

# UP2C-4R7-R

#### **UP2C-4R7-R Information**



| rt Number  | UP2C-4R7-R  |
|------------|---|
| nufacturer | Eaton   |
| tegory     | Inductors, Coils, Chokes<br>Fixed Inductors         |
| scription  | FIXED IND 4.7UH 5.62A 11.7 MOHM                     |
| ckage      | Nonstandard   |
|            | For the pricing/inventory/lead time, please contact |
|            | us  |
|            | Website: https://www.heisener.com                   |
|            | E-mail: salesdept@heisener.com                      |



Request a Quote

For Reference Only

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




### **UP2C-4R7-R Specifications**

| Manufacturer Part Number  | UP2C-4R7-R                             |
|---------------------------|--|
| Manufacturer              | Eaton                                  |
| Category                  | Inductors, Coils, Chokes               |
|                           | Fixed Inductors                        |
| Package                   | Nonstandard                            |
| Series                    | UNI-PAC? 2C                            |
| Туре                      | Wirewound                              |
| Material - Core           | Ferrite                                |
| Inductance                | 4.7µH                                  |
| Tolerance                 | ±20%                                   |
| Current Rating            | 5.62A                                  |
| Current - Saturation      | 6.2A                                   |
| Shielding                 | Unshielded                             |
| DC Resistance (DCR)       | 11.7 mOhm                              |
| Q @ Freq                  | -                                      |
| Frequency - Self Resonant | -                                      |
| Ratings                   | -                                      |
| Operating Temperature     | -40°C ~ 85°C                           |
| Frequency - Test          | 100kHz                                 |
| Features                  | -                                      |
| Mounting Type             | Surface Mount                          |
| Package / Case            | Nonstandard                            |
| Supplier Device Package   | -                                      |
| Size / Dimension          | 0.507" L x 0.370" W (12.90mm x 9.40mm) |
|                           |  |

0.205" (5.20mm)

#### **UP2C-4R7-R Guarantees**

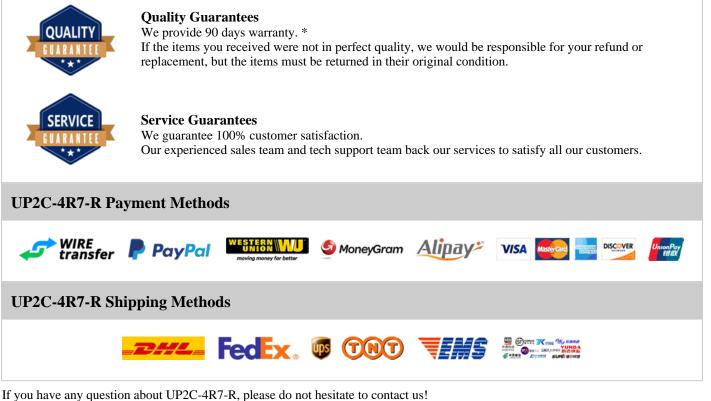

If you have any question about UP2C-4R7-R, please do not hesitate to contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com