


UPB1H3R3MDD1TD

UPB1H3R3MDD1TD Information



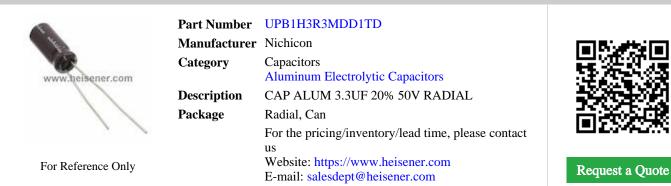

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



UPB1H3R3MDD1TD Specifications

Operating Temperature	-40°C ~ 105°C
Operating Temperature	-40°C ~ 105°C
Polarization	Polar
Applications	General Purpose
Ripple Current - Low Frequency	20mA @ 120Hz
Ripple Current - High Frequency	33mA @ 100kHz
Impedance	-
Lead Spacing	0.079" (2.00mm)
Size / Dimension	0.197" Dia (5.00mm)
Height - Seated (Max)	0.492" (12.50mm)
Surface Mount Land Size	-
Mounting Type	Through Hole
	Radial, Can
Package / Case	Kaulai, Call

UPB1H3R3MDD1TD Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

UPB1H3R3MDD1TD Payment Methods





If you have any question about UPB1H3R3MDD1TD, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com