


UPW1J680MPH

Request a Quote

UPW1J680MPH Information



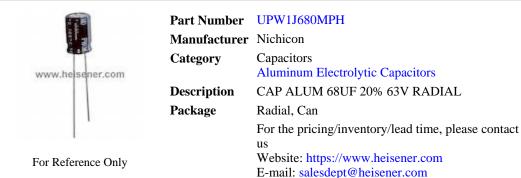

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



UPW1J680MPH Specifications

Manufacturer Part NumberUPW 1/680/MPHManufacturerNichiconCategoryCapacitorsPackageRadial, CanPackageRadial, CanSeriesUPWCapacitance68µFTolerance20%Voltage - Rated63VSR (Equivalent Series Resistance)-Operating Temperature55° C ^ 105°COperating Temperature60µA Applications60µA Ripple Current - High Frequency632 SmA Ripple Current - High Frequency632 SmA Size / Dimension342 mohmsSize / Dimension.315° Dia (Su0mn)Size / Dimension.315° Dia (Su0mn)Munting Type-Houting TypeManufacture ManuApple Current - High FrequencyAda (Su0mn)Size / Dimension.315° Dia (Su0mn)Size / Dimension.315° Dia (Su0mn)Size / Dimension.425° (1.50mn)Size / Dimension.455° (1.50mn)Size / Dimension.450° (1.50mn)Size / Dimension </th <th>-</th> <th></th>	-	
CategoryCapacitorsAluminum Electrolytic CapacitorsPackageRadial, CanSeriesUPWCapacitance68µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature55°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - High Frequency405mA @ 100kHzImpedance342 mOhmsLad Spacing0.138° (3.50mm)Size / Dimension0.315° Dia (8.00mm)Height - Seated (Max)0.453° (11.50mm)Mounting TypeFincugationPackage / CaseKala, Can	Manufacturer Part Number	UPW1J680MPH
Aluminum Electrolytic CapacitorsPackageRadial, CanSeriesUPWCapacitance68µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationGeneral PurposeApplicationsGeneral PurposeRipple Current - Low Frequency263.25mA @ 120HzImpedance342 mOhmsLead Spacing0.138° (3.50mm)Size / Dimension0.315° Dia (8.00mm)Size / Dimension0.453° (11.50mm)Surface Mount Land Size-Mounting TypeRadial, Can	Manufacturer	Nichicon
PackageRadial, CanSeriesUPWCapacitance68µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature55°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency263.25mA @ 120HzImpedance0.138" (3.50mm)Lead Spacing0.315" Dia (8.00mm)Size / Dimension0.315" Dia (8.00mm)Size / Dimension0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Category	Capacitors
SeriesUPWCapacitance68µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - High Frequency405mA @ 100kHzImpedance342 mOhmsSize / Dimension0.315° Dia (8.00mm)Size / Dimension0.453° (1.150mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseKadial, Can		Aluminum Electrolytic Capacitors
Capacitance68μFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency263.25mA @ 120HzImpedance342 mOhmsIszer J Dimension0.315° Dia (8.00mm)Neight - Seated (Max)0.315° Dia (8.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseKadia, Can	Package	Radial, Can
Tolerance±0%Voltage - Rated63VVoltage - Rated0300 Hrs @ 105°CESR (Equivalent Series Resistance)-Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency263.25mA @ 120HzImpedance342 mOhmsInpedance0.138" (3.50mn)Size / Dinension0.315" Dia (8.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRatial, Can	Series	UPW
Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency263.25mA @ 120HzImpedance342 mOhmsInpedance0.138" (3.50mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Capacitance	68µF
ESR (Equivalent Series Resistance)-Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency263.25mA @ 120HzRipple Current - High Frequency405mA @ 100kHzImpedance342 mOhmsLead Spacing0.138" (3.50mm)Size / Dimension0.453" (11.50mm)Height - Seated (Max)-Surface Mount Land Size-Mounting TypeEndage (CasePackage / CaseRadial, Can	Tolerance	±20%
Lifetime @ Temp.3000 Hrs @ 105°COperating Temperature-55°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency263.25mA @ 120HzRipple Current - High Frequency405mA @ 100kHzImpedance342 mOhmsLead Spacing0.138" (3.50mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Voltage - Rated	63V
Operating Temperature-55°C ~ 105°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency263.25mA @ 120HzRipple Current - High Frequency405mA @ 100kHzImpedance342 mOhmsLead Spacing0.138" (3.50mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	ESR (Equivalent Series Resistance)	-
PolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency263.25mA @ 120HzRipple Current - High Frequency405mA @ 100kHzImpedance342 mOhmsLead Spacing0.138" (3.50mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lifetime @ Temp.	3000 Hrs @ 105°C
ApplicationsGeneral PurposeRipple Current - Low Frequency263.25mA @ 120HzRipple Current - High Frequency405mA @ 100kHzImpedance342 mOhmsLead Spacing0.138" (3.50mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Operating Temperature	-55°C ~ 105°C
Ripple Current - Low Frequency263.25mA @ 120HzRipple Current - High Frequency405mA @ 100kHzImpedance342 mOhmsLead Spacing0.138" (3.50mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Polarization	Polar
Ripple Current - High Frequency405mA @ 100kHzImpedance342 mOhmsLead Spacing0.138" (3.50mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Applications	General Purpose
In pedance342 mOhmsLead Spacing0.138" (3.50mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - Low Frequency	263.25mA @ 120Hz
IILead Spacing0.138" (3.50mm)Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - High Frequency	405mA @ 100kHz
Size / Dimension0.315" Dia (8.00mm)Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Impedance	342 mOhms
Height - Seated (Max)0.453" (11.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lead Spacing	0.138" (3.50mm)
Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Size / Dimension	0.315" Dia (8.00mm)
Mounting TypeThrough HolePackage / CaseRadial, Can	Height - Seated (Max)	0.453" (11.50mm)
Package / Case Radial, Can	Surface Mount Land Size	-
	Mounting Type	Through Hole
Report error	Package / Case	Radial, Can
		Report errors?

UPW1J680MPH Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

UPW1J680MPH Payment Methods



UPW1J680MPH Shipping Methods



If you have any question about UPW1J680MPH, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com