


UVR1A103MHA

Request a Quote

UVR1A103MHA Information

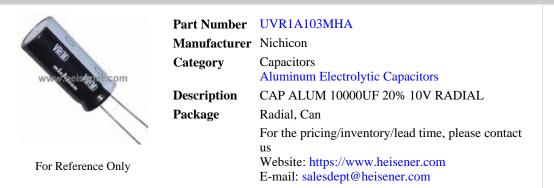

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



UVR1A103MHA Specifications

ManufacturerNichiconCapacitorsCapacitorsAluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance10000µFTolerance±20%Voltage - Rated10VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating TemperaturePolarApplicationsGeneral PurposeRipple Current - Low Frequency3.105A @ 10kHzImpedance-Lied Spacing0.295° (7.50mm)Size / Dimension0.630° Dia (16.00mm)Height - Seated (Max)3.198° (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseKadial, Can	-	
CategoryCapacitorsAluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance1000µFTolerance±20%Voltage - Rated10VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature000 Jrs @ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency3.105A @ 10kHzImpedance-Lead Spacing0.295°(7.50mm)Size / Dimension0.630° Dia (16.00mm)Height - Seated (Max)1.398° (35.50mm)Surface Mount Land Size-Package / CaseKadia, Can	Manufacturer Part Number	UVR1A103MHA
Aluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance10000µFTolerance±20%Voltage - Rated0VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationGeneral PurposeRipple Current - Low Frequency3.105A @ 10kHzRipple Current - High Frequency0.295° (7.50mm)Size / Dimension0.630° Dia (16.00mm)Height - Seated (Max)1.398° (35.50mm)Surface Mount Land Size-Package / CaseRadial, Can	Manufacturer	Nichicon
PackageRadial, CanSeriesUVRCapacitance1000µFTolerance±20%Voltage - Rated10VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationGeneral PurposeApplications2.7A @ 120HzRipple Current - High Frequency3.105A @ 10kHzImpedance0.295° (7.50mm)Size / Dimension0.630° Dia (16.00mm)Height - Seated (Max)3.198° (35.50mm)Surface Mount Land Size-Package / CaseKadial, Can	Category	Capacitors
SeriesUVRCapacitance10000µFTolerance±20%Voltage - Rated10VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency3.105A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.630" Dia (16.00mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseKadial, Can		Aluminum Electrolytic Capacitors
Capacitance10000µFTolerance±20%Voltage - Rated10VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.7A @ 120HzImpedance-Lead Spacing0.295°(7.50mm)Size / Dimension0.630° Dia (16.00mm)Height - Seated (Max)1.398° (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseKalial, Can	Package	Radial, Can
Tolerance±20%Voltage - Rated10VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarrPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.7A @ 120HzRipple Current - High Frequency3.105A @ 10kHzImpedance-Lead Spacing0.630" Dia (16.00mm)Size / Dimension1.398" (35.50mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Pokage / CaseRatial, Can	Series	UVR
Voltage - Rated10VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.7A @ 120HzImpedance-Lead Spacing0.630" Dia (16.00mm)Size / Dimension1.398" (35.50mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Pockage / CaseRatial, Can	Capacitance	10000µF
ESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.7A @ 120HzBipple Current - High Frequency3.105A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.630" Dia (16.00mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Pounting TypeThrough HolePackage / CaseRadial, Can	Tolerance	±20%
Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.7A @ 120HzRipple Current - High Frequency3.105A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.630" Dia (16.00mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Voltage - Rated	10V
Operating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.7A @ 120HzRipple Current - High Frequency3.105A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.630" Dia (16.00mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Mounting TypeFnough HolePackage / CaseRadial, Can	ESR (Equivalent Series Resistance)	-
PolarizationPolarPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.7A @ 120HzRipple Current - High Frequency3.105A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.630" Dia (16.00mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lifetime @ Temp.	2000 Hrs @ 85°C
ApplicationsGeneral PurposeRipple Current - Low Frequency2.7A @ 120HzRipple Current - High Frequency3.105A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.630" Dia (16.00mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Operating Temperature	-40°C ~ 85°C
Ripple Current - Low Frequency2.7A @ 120HzRipple Current - High Frequency3.105A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.630" Dia (16.00mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Polarization	Polar
In a constraint of the formula of t	Applications	General Purpose
Impedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.630" Dia (16.00mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - Low Frequency	2.7A @ 120Hz
Lead Spacing0.295" (7.50mm)Size / Dimension0.630" Dia (16.00mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - High Frequency	3.105A @ 10kHz
Size / Dimension0.630" Dia (16.00mm)Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Impedance	-
Height - Seated (Max)1.398" (35.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lead Spacing	0.295" (7.50mm)
Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Size / Dimension	0.630" Dia (16.00mm)
Mounting TypeThrough HolePackage / CaseRadial, Can	Height - Seated (Max)	1.398" (35.50mm)
Package / Case Radial, Can	Surface Mount Land Size	-
	Mounting Type	Through Hole
Report errors?	Package / Case	Radial, Can
		Report errors?

UVR1A103MHA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE GUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

UVR1A103MHA Payment Methods



UVR1A103MHA Shipping Methods



If you have any question about UVR1A103MHA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com