


UVR1J222MHD

Request a Quote

UVR1J222MHD Information

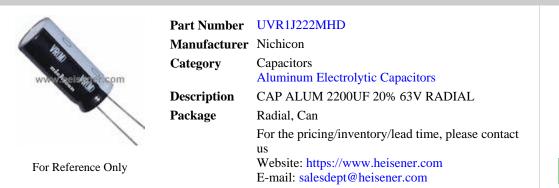

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



UVR1J222MHD Specifications

ManufacturerNichiconCapacitorsCapacitorsAluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance2200µFTolerance±20%Voltage - Rated63VSSR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationGeneral PurposeApplicationsGeneral PurposeRipple Current - High Frequency2.445 A @ 10kHzImpedance-Lied Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Package / CaseKadial, Can	-	
CategoryCapacitorsAluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance2200µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ S°COperating Temperature-000 Hrs @ S°CPolarizationPolarApplicationsGeneral PurposeRipple Current - High Frequency2.645A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension1.476" (37.50mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Package / CaseRadial, Can	Manufacturer Part Number	UVR1J222MHD
Aluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance2200μFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationGeneral PurposeApplicationsCaneral PurposeRipple Current - Low Frequency2.645A @ 10kHzImpedance-Lad Spacing0.295°(7.50mm)Size / Dimension0.709° Dia (18.00mm)Height - Seated (Max)1.476° (37.50mm)Surface Mount Land Size-Package / CaseKadial, Can	Manufacturer	Nichicon
PackageRadial, CanSeriesUVRCapacitance2200μFTolerance+20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationGeneral PurposeApplications2.3A @ 120HzRiple Current - Low Frequency2.645A @ 10kHzImpedance0.295° (7.50mm)Siz / Dimension0.709° Dia (18.00mm)Siz / Dimension1.476° (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseKalia, Can	Category	Capacitors
SeriesUVRCapacitance2200µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.645A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseKadial, Can		Aluminum Electrolytic Capacitors
Capacitance2200µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.645A @ 10kHzImpedance-Lead Spacing0.295°(7.50mm)Size / Dimension1.476°(37.50mm)Height - Seated (Max)-Mounting TypeThrough HolePackage / CaseRatial, Can	Package	Radial, Can
Tolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarrPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.3A @ 120HzRipple Current - High Frequency0.295°(7.50mm)Size / Dimension0.709° Dia (18.00mm)Height - Seated (Max)1.476° (37.50mm)Surface Mount Land Size-Pokage / CaseRatial, Can	Series	UVR
Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.3A @ 120HzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension1.476" (37.50mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Pockage / CaseRadial, Can	Capacitance	2200µF
ESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.3A @ 120HzBipple Current - High Frequency2.645A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension1.476" (37.50mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Tolerance	±20%
Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.3A @ 120HzRipple Current - High Frequency2.645A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeFackage / CaseRadial, CanRadial, Can	Voltage - Rated	63V
Operating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.3A @ 120HzBipple Current - High Frequency2.645A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeFackage / CaseRadial, CanRadial, Can	ESR (Equivalent Series Resistance)	-
PolarizationPolarPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency2.3A @ 120HzRipple Current - High Frequency2.645A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lifetime @ Temp.	2000 Hrs @ 85°C
ApplicationsGeneral PurposeRipple Current - Low Frequency2.3A @ 120HzRipple Current - High Frequency2.645A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Operating Temperature	$-40^{\circ}\mathrm{C} \sim 85^{\circ}\mathrm{C}$
Ripple Current - Low Frequency2.3A @ 120HzRipple Current - High Frequency2.645A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Polarization	Polar
In a constraint of the formula of t	Applications	General Purpose
Impedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - Low Frequency	2.3A @ 120Hz
Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - High Frequency	2.645A @ 10kHz
Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Impedance	-
Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lead Spacing	0.295" (7.50mm)
Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Size / Dimension	0.709" Dia (18.00mm)
Mounting TypeThrough HolePackage / CaseRadial, Can	Height - Seated (Max)	1.476" (37.50mm)
Package / Case Radial, Can	Surface Mount Land Size	-
	Mounting Type	Through Hole
Report errors?	Package / Case	Radial, Can
		Report errors?

UVR1J222MHD Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

UVR1J222MHD Payment Methods



UVR1J222MHD Shipping Methods



If you have any question about UVR1J222MHD, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com