


# UVR1J471MHA

**Request a Quote** 

## **UVR1J471MHA Information**

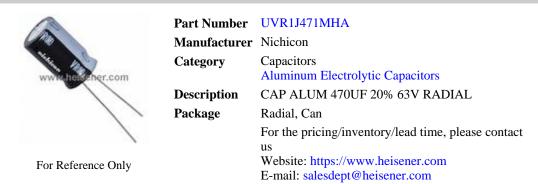

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# **UVR1J471MHA Specifications**

CategoryCapacitorsAluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance470µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature900m A @ 120 HzApplicationsGeneral PurposeRipple Current - High Frequency900m A @ 120 HzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Pokage / CaseThrough HolePackage / CaseRadial, Can	-	
CategoryCapacitorsAluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance470µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature900m A @ 120 HzApplicationsGeneral PurposeRipple Current - High Frequency900m A @ 120 HzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Pokage / CaseThrough HolePackage / CaseRadial, Can	Manufacturer Part Number	UVR1J471MHA
Aluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance470µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationGeneral PurposeApplicationsGeneral PurposeRipple Current - Low Frequency900mA @ 120HzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Package / CaseRadial, Can	Manufacturer	Nichicon
PackageRadial, CanSeriesUVRCapacitance470µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationFolarApplicationsGeneral PurposeRiple Current - Low Frequency900mA @ 120HzImpedance-Liad Spacing0.197" (5.00mm)Siz / Dimension0.492" Dia (12.50mm)Siz / Dimension0.866" (22.00mm)Surface Mount Land Size-Mounting TypeHolePackage / CaseKalia, Can	Category	Capacitors
SeriesUVRCapacitance470µFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency900mA @ 120HzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseKadial, Can		Aluminum Electrolytic Capacitors
Capacitance470μFTolerance±20%Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency900mA @ 120HzInpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRatial, Can	Package	Radial, Can
Tolerance±20%Voltage Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency900mA @ 120HzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRatial, Can	Series	UVR
Voltage - Rated63VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency900mA @ 120HzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeFancePackage / CaseRatial, Can	Capacitance	470µF
ESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency900mA @ 120HzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Tolerance	±20%
Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency900mA @ 120HzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Voltage - Rated	63V
Operating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency900mA @ 120HzBipple Current - High Frequency1.35A @ 10kHzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeFhough HolePackage / CaseRadial, Can	ESR (Equivalent Series Resistance)	-
PolarizationPolarPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency900mA @ 120HzRipple Current - High Frequency1.35A @ 10kHzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lifetime @ Temp.	2000 Hrs @ 85°C
ApplicationsGeneral PurposeRipple Current - Low Frequency900mA @ 120HzRipple Current - High Frequency1.35A @ 10kHzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Operating Temperature	-40°C ~ 85°C
AARipple Current - Low Frequency900mA @ 120HzRipple Current - High Frequency1.35A @ 10kHzImpedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Polarization	Polar
In PropositionInternational of the second secon	Applications	General Purpose
Impedance-Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - Low Frequency	900mA @ 120Hz
Lead Spacing0.197" (5.00mm)Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - High Frequency	1.35A @ 10kHz
Size / Dimension0.492" Dia (12.50mm)Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Impedance	-
Height - Seated (Max)0.866" (22.00mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lead Spacing	0.197" (5.00mm)
Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Size / Dimension	0.492" Dia (12.50mm)
Mounting TypeThrough HolePackage / CaseRadial, Can	Height - Seated (Max)	0.866" (22.00mm)
Package / Case Radial, Can	Surface Mount Land Size	-
	Mounting Type	Through Hole
Report errors?	Package / Case	Radial, Can
		Report errors?

#### **UVR1J471MHA Guarantees**



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### **UVR1J471MHA Payment Methods**



# **UVR1J471MHA Shipping Methods**



If you have any question about UVR1J471MHA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com