


# UVR2D221MHA

**Request a Quote** 

## **UVR2D221MHA Information**

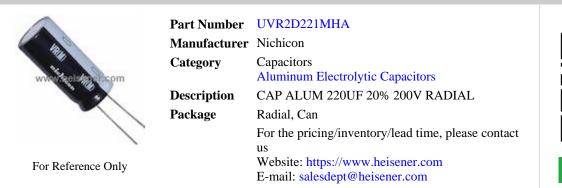

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **UVR2D221MHA Specifications**

ManufacturerNichiconCapacitorsCapacitorsAluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance20µFTolerance±20%Voltage - Rated200VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating TemperaturePolarApplicationsGeneral PurposeRipple Current - High Frequency1.296A @ 10kHzImpedance-Lied Spacing0.295° (7.50mm)Size / Dimension0.709° Dia (18.00mm)Height - Seated (Max)1.476° (37.50mm)Surface Mount Land Size-Package / CaseKaila, Can	-	
CategoryCapacitorsAluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance20µFTolerance±20%Voltage - Rated200VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationReineral PurposeApplicationsGeneral PurposeRipple Current - Low Frequency810mA @ 120HzImpedance-Lied Spacing0.295°(7.50mm)Size / Dimension0.709° Dia (18.00mm)Height - Seated (Max)1.476° (37.50mm)Surface Mount Land Size-Package / CaseRadial, Can	Manufacturer Part Number	UVR2D221MHA
Aluminum Electrolytic CapacitorsPackageRadial, CanSeriesUVRCapacitance220µFTolerance±20%Voltage - Rated00VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationGeneral PurposeRipple Current - Low Frequency810mA @ 120HzRipple Current - High Frequency1.296A @ 10kHzImpedance-Lead Spacing0.709° Dia (18.00mm)Size / Dimension1.476° (37.50mm)Surface Mount Land Size-Package / CaseRadial, Can	Manufacturer	Nichicon
PackageRadial, CanSeriesUVRCapacitance20\u00ffFTolerance±20\u00ffVoltage - Rated200VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature40°C ~ 85°CPolarizationFelaeral PurposeApplicationsSilom A @ 120HzRiple Current - High Frequency1.296A @ 10kHzImpedance0.295° (7.50mm)Size / Dimension0.709° Dia (18.00mm)Height - Seated (Max)1.476° (37.50mm)Surface Mount Land Size-Package / CaseKadial, Can	Category	Capacitors
SeriesUVRCapacitance220µFTolerance±20%Voltage - Rated200VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency1.296A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Package / CaseRatial, Can		Aluminum Electrolytic Capacitors
Capacitance220μFTolerance±20%Voltage - Rated200VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency1.296A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Polaring TypeThrough HolePackage / CaseRatial, Can	Package	Radial, Can
Tolerance±20%Voltage - Rated200VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarrPolarApplicationsGeneral PurposeRipple Current - Low Frequency810mA @ 120HzRipple Current - High Frequency.296A @ 10kHzImpedance-Lead Spacing0.295° (7.50mm)Size / Dimension1.476° (37.50mm)Height - Seated (Max)1.476° (37.50mm)Surface Mount Land Size-Package / CaseRatial, Can	Series	UVR
Voltage - Rated200VESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency810mA @ 120HzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension1.476" (37.50mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Package / CaseRatial, Can	Capacitance	220µF
Constraint-ESR (Equivalent Series Resistance)-Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency810mA @ 120HzBipple Current - High Frequency1.296A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension1.476" (37.50mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Package / CaseRadial, Can	Tolerance	±20%
Lifetime @ Temp.2000 Hrs @ 85°COperating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency810mA @ 120HzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Voltage - Rated	200V
Operating Temperature-40°C ~ 85°CPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency810mA @ 120HzRipple Current - High Frequency1.296A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeFurough HolePackage / CaseRadial, Can	ESR (Equivalent Series Resistance)	-
PolarizationPolarPolarizationPolarApplicationsGeneral PurposeRipple Current - Low Frequency810mA @ 120HzRipple Current - High Frequency1.296A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lifetime @ Temp.	2000 Hrs @ 85°C
ApplicationsGeneral PurposeRipple Current - Low Frequency810mA @ 120HzRipple Current - High Frequency1.296A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Operating Temperature	-40°C ~ 85°C
AARipple Current - Low Frequency810mA @ 120HzRipple Current - High Frequency1.296A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Polarization	Polar
InInRipple Current - High Frequency1.296A @ 10kHzImpedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Applications	General Purpose
Impedance-Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - Low Frequency	810mA @ 120Hz
Lead Spacing0.295" (7.50mm)Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Ripple Current - High Frequency	1.296A @ 10kHz
Size / Dimension0.709" Dia (18.00mm)Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Impedance	-
Height - Seated (Max)1.476" (37.50mm)Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Lead Spacing	0.295" (7.50mm)
Surface Mount Land Size-Mounting TypeThrough HolePackage / CaseRadial, Can	Size / Dimension	0.709" Dia (18.00mm)
Mounting TypeThrough HolePackage / CaseRadial, Can	Height - Seated (Max)	1.476" (37.50mm)
Package / Case Radial, Can	Surface Mount Land Size	-
	Mounting Type	Through Hole
Report errors?	Package / Case	Radial, Can
		Report errors?

#### **UVR2D221MHA Guarantees**



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### **UVR2D221MHA Payment Methods**



## **UVR2D221MHA Shipping Methods**



If you have any question about UVR2D221MHA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com