

VI-2VP-EX-F1

st a Quote

VI-2VP-EX-F1 Information

| A NOT THE REAL POINT | Part Number | VI-2VP-EX-F1 | |
|----------------------|--------------|---|------------|
| | Manufacturer | Vicor Corporation | |
| | Category | Power Supplies - Board Mount DC DC Converters | |
| | Description | CONVERTER MOD DC/DC 13.8V 75W | - 20 K |
| | Package | Full Brick | |
| | | For the pricing/inventory/lead time, please contact us | B 3 |
| For Reference Only | | Website: https://www.heisener.com E-mail: salesdept@heisener.com | Reques |

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




VI-2VP-EX-F1 Specifications

| Manufacturer Part Number | VI-2VP-EX-F1 | |
|--------------------------|---|--|
| Manufacturer | Vicor Corporation | |
| Category | Power Supplies - Board Mount | |
| | DC DC Converters | |
| Package | Full Brick | |
| Series | VI-200 | |
| Туре | Isolated Module | |
| Number of Outputs | 1 | |
| Voltage - Input (Min) | 9V | |
| Voltage - Input (Max) | 36V | |
| Voltage - Output 1 | 13.8V | |
| Voltage - Output 2 | - | |
| Voltage - Output 3 | - | |
| Voltage - Output 4 | - | |
| Current - Output (Max) | 5.43A | |
| Power (Watts) | 75W | |
| Voltage - Isolation | 3kV (3000V) | |
| Applications | ITE (Commercial) | |
| Features | OCP, OTP, OVP, SCP | |
| Operating Temperature | -10°C ~ 85°C | |
| Efficiency | 88% | |
| Mounting Type | Through Hole | |
| Package / Case | Full Brick | |
| Size / Dimension | 4.60" L x 1.86" W x 0.79" H (116.8mm x 47.2mm x 20.1mm) | |
| | | |

| Supplier Device Package | - |
|-------------------------|----------------|
| Control Features | - |
| | Report errors? |

VI-2VP-EX-F1 Guarantees

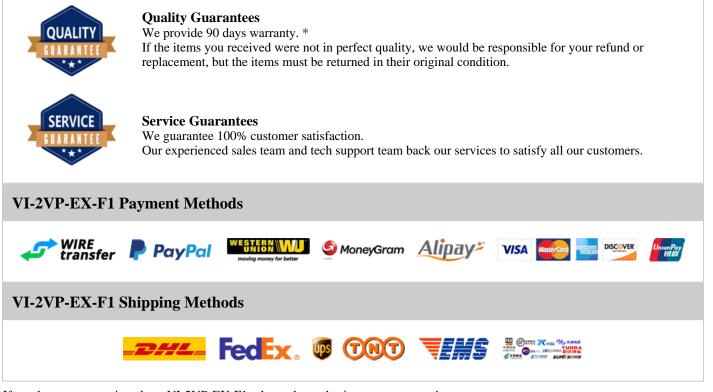

If you have any question about VI-2VP-EX-F1, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com