


VR68000001303JAC00

VR68000001303JAC00 Information

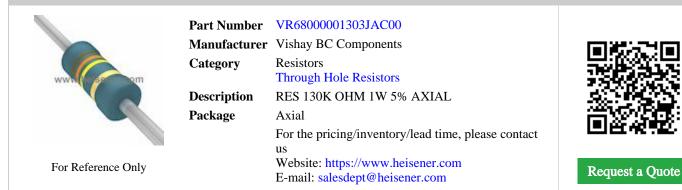

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



VR68000001303JAC00 Specifications

Manufacturer Part NumberVR6800001303JAC00ManufacturerVishay BC ComponentsCategoryResistorsThrough Hole ResistorsPackageAxialSeriesVR68Resistance130 kOhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesHigh Voltage, Pulse WithstandingPorerating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device PackageAxialFieight - Seated (Max)-High Y- Seated (Max)-Ster / Dimension2000 m/°C (6.80mm x 18.00mm)Hight - Seated (Max)-Hight - Seated (Max)-Number of Terminations2		
CategoryRestoreCategoryThrough Hole ResistorsPackageAxialPackageVR68Resistance130 kOhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesHigh Voltage, Pulse WithstandingPoperating Temperature-55°CPackage / CaseAxialSupplier Device Package0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)2	Manufacturer Part Number	VR68000001303JAC00
Through Hole ResistorsPackageAxialSeriesVR68Resistance130 kOhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesHigh Voltage, Pulse WithstandingTemperature Coefficient±200pm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)2	Manufacturer	Vishay BC Components
PackageAxiaSeriesVR68Resistance130 kOhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesHigh Voltage, Pulse WithstandingTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)2	Category	Resistors
SeriesVR68Resistance130 kOhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesHigh Voltage, Pulse WithstandingTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)2		Through Hole Resistors
Resistance130 kOhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesHigh Voltage, Pulse WithstandingTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)2	Package	Axial
Tolerance±5%Power (Watts)1WCompositionMetal FilmFeaturesHigh Voltage, Pulse WithstandingTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device Package0268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)2Number of Terminations2	Series	VR68
Power (Watts)IWPower (Watts)Metal FilmCompositionMetal FilmFeaturesHigh Voltage, Pulse WithstandingTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)-Number of Terminations2	Resistance	130 kOhms
CompositionMetal FilmFeaturesHigh Voltage, Pulse WithstandingTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)-Number of Terminations2	Tolerance	±5%
FeaturesHigh Voltage, Pulse WithstandingTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)-Number of Terminations2	Power (Watts)	1W
Temperature Coefficient±200pm/°COperating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)-Number of Terminations2	Composition	Metal Film
Operating Temperature-55°C ~ 155°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)-Number of Terminations2	Features	High Voltage, Pulse Withstanding
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)-Number of Terminations2	Temperature Coefficient	±200ppm/°C
Supplier Device PackageAxialSize / Dimension0.268" Dia x 0.709" L (6.80mm x 18.00mm)Height - Seated (Max)-Number of Terminations2	Operating Temperature	-55°C ~ 155°C
Size / Dimension 0.268" Dia x 0.709" L (6.80mm x 18.00mm) Height - Seated (Max) - Number of Terminations 2	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2	Supplier Device Package	Axial
Number of Terminations 2	Size / Dimension	0.268" Dia x 0.709" L (6.80mm x 18.00mm)
	Height - Seated (Max)	-
	Number of Terminations	2
Failure Rate -	Failure Rate	-
Report errors?		Report errors?

VR68000001303JAC00 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

VR68000001303JAC00 Payment Methods



If you have any question about VR68000001303JAC00, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com