


## WKP102MCPDF0KR

#### WKP102MCPDF0KR Information

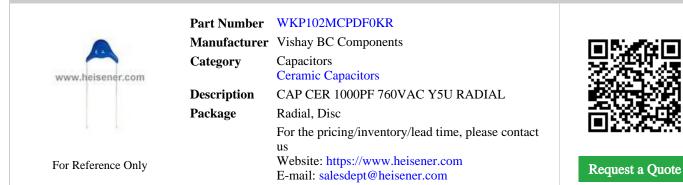

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### WKP102MCPDF0KR Specifications

Manufacturer Part Number   WKP102MCPDF0KR     Manufacturer   Vishay BC Components     Category   Capacitors     Catagory   Ceramic Capacitors     Package   Radial, Disc     Series   WKP     Capacitance   1000pF     Tolerance   ±20%     Voltage - Rated   760VAC     Operating Temperature Coefficient   500 VAC     Pactures   -     Ratings   X1, Y1     Applications   Safety     Failure Rate   -     Mounting Type   Through Hole     Package / Case   Radial, Disc     Size / Dimension   0.394" Dia (10.00mm)     Height - Seated (Max)   -     Thickness (Max)   -     Lead Spacing   0.492" (12.50mm)		
CategoryCapacitorsPackageRadial, DiscPackageRadial, DiscSeriesWKPCapacitance1000FTolerance±20%Voltage - Rated760VACTomperature CoefficientY5U (E)Operating Temperature-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / Case0.394" Dia (10.00mm)Size / Dimension0.512" (13.00mm)Height - Seated (Max)-Thickness (Max)-Lead SpacingMarcing TemperatureLead StyleStriaght	Manufacturer Part Number	WKP102MCPDF0KR
Indext Ceramic CapacitorsPackageRadial, DiscSeriesWKPCapacitance1000pFTolerance±20%Voltage - Rated760VACTemperature CoefficientYSU (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeSafetySize / Dimension0.304° Dia (10.00mm)Size / Dimension0.512° (13.00mm)Height - Seated (Max)0.512° (13.00mm)Thickness (Max)-Lead Spacing0.492° (12.50mm)Lead StyleStraight	Manufacturer	Vishay BC Components
PackageRadial, DiscSeriesWKPCapacitance1000pFTolerance±20%Voltage - Rated760VACTemperature CoefficientY5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeNongh HoleSack / CaseRadia, DiscSize / Dimension0.394° Dia (10.00mm)Height - Seated (Max)-Thickness (Max)-Lead SpacingMateryLead StyleStraight	Category	Capacitors
SeriesWKPCapacitance1000pFTolerance±20%Voltage - Rated760VACTemperature CoefficientY5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HoleSize / Dimension0.394° Dia (10.00mm)Height - Seated (Max)0.512° (13.00mm)Thickness (Max)-Lead Spacing0.492° (12.50mm)Lead StyleStraight		Ceramic Capacitors
Capacitance1000pFTolerance±20%Voltage - Rated760VACTemperature CoefficientV5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1 Y1ApplicationsSafetyFailure Rate-Mounting TypeMough HoleSize / DimensionN34° Dia (10.00mm)Height - Seated (Max)0.512° (13.00mm)Thickness (Max)-Lead Spacing0.492° (12.50mm)Lead StyleStraight	Package	Radial, Disc
Tolerance±20%Voltage - Rated760VACTemperature CoefficientY5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseSadial, DiscSize / Dimension0.512" (13.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6492" (12.50mm)Lead StyleStraight	Series	WKP
Voltage - Rated760VACTemperature CoefficientV5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Capacitance	1000pF
Temperature CoefficientY5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Tolerance	±20%
Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStringth	Voltage - Rated	760VAC
Features-Features-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Temperature Coefficient	Y5U (E)
RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Operating Temperature	-40°C ~ 125°C
ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Ratings	X1, Y1
Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Applications	Safety
Package / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.394" Dia (10.00mm)   Height - Seated (Max) 0.512" (13.00mm)   Thickness (Max) -   Lead Spacing 0.492" (12.50mm)   Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Package / Case	Radial, Disc
Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Size / Dimension	0.394" Dia (10.00mm)
Lead Spacing0.492" (12.50mm)Lead StyleStraight	Height - Seated (Max)	0.512" (13.00mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.492" (12.50mm)
Report errors?	Lead Style	Straight
		Report errors?

#### WKP102MCPDF0KR Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### WKP102MCPDF0KR Payment Methods



If you have any question about WKP102MCPDF0KR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com