


WKP102MCPEF0KR

WKP102MCPEF0KR Information

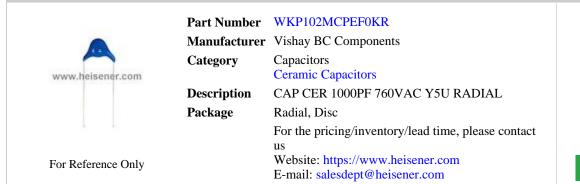

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



Request a Quote

WKP102MCPEF0KR Specifications

Manufacturer Part Number WKP102MCPEF0KR Manufacturer Vishay BC Components Category Capacitors Category Ceramic Capacitors Package Radial, Disc Series WKP Capacitance 1000pF Tolerance ±20% Voltage - Rated 760VAC Penetruer Coefficient YSU (E) Operating Temperature - Operating Temperature - Applications X1, Y1 Applications Safety Failure Rate - Mounting Type Safety Package / Case Radial, Disc Size / Dimension 0.542" (13.00mm) Height - Seated (Max) 0.512" (13.00mm) Thickness (Max) - Lead Spacing 0.492" (12.50mm)		
CategoryCapacitorsPackageRadial, DiscPackageRadial, DiscSeriesWKPCapacitance1000pFTolerance±20%Voltage - Rated760VACTomperature CoefficientY5U (E)Operating Temperature-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeSafetyFailure Rate.Mounting Type0.394" Dia (10.00mm)Faight - Seated (Max).512" (13.00mm)Height - Seated (Max).Thickness (Max).Lead SpacingMarcianted (Safety)Lead StyleSare (Safety)	Manufacturer Part Number	WKP102MCPEF0KR
Indext Ceramic CapacitorsPackageRadial, DiscSeriesWKPCapacitance1000pFTolerance±20%Voltage - Rated760VACTemperature CoefficientY5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeSafetySize / Dimension0.304° Dia (10.00mm)Size / Dimension0.512° (13.00mm)Height - Seated (Max)0.512° (13.00mm)Thickness (Max)-Lead Spacing0.492° (12.50mm)	Manufacturer	Vishay BC Components
PackageRadial, DiscSeriesWKPCapacitance1000pFTolerance±20%Voltage - Rated760VACTemperature CoefficientY5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeNongh HoleSize / Dimension0.394° Dia (10.00mm)Size / Dimension5.12° (13.00mm)Height - Seated (Max)-Thickness (Max)-Lead SpacingMargingLead StyleStraight	Category	Capacitors
SeriesWKPCapacitance1000pFTolerance±20%Voltage - Rated760VACTemperature CoefficientY5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HoleSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)5.12" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight		Ceramic Capacitors
Capacitance1000pFTolerance±20%Voltage - Rated760VACTemperature CoefficientY5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeMough HoleSize / Dimension0.512° (13.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492° (12.50mm)Lead StyleStraight	Package	Radial, Disc
Tolerance±20%Voltage - Rated760VACTemperature CoefficientY5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.512" (13.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6492" (12.50mm)Lead StyleStraight	Series	WKP
Voltage - Rated760VACTemperature CoefficientV5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFaiture Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.512" (13.00mm)Height - Seated (Max)-Thickness (Max)0.492" (12.50mm)Lead SpacingStraight	Capacitance	1000pF
Temperature CoefficientY5U (E)Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseSafdi, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Tolerance	±20%
Operating Temperature-40°C ~ 125°CFeatures-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Voltage - Rated	760VAC
Features-Features-RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStright	Temperature Coefficient	Y5U (E)
RatingsX1, Y1ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)0.492" (12.50mm)Lead SpacingStraight	Operating Temperature	-40°C ~ 125°C
ApplicationsSafetyFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Ratings	X1, Y1
Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Applications	Safety
Package / CaseRadial, DiscSize / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.394" Dia (10.00mm) Height - Seated (Max) 0.512" (13.00mm) Thickness (Max) - Lead Spacing 0.492" (12.50mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.512" (13.00mm)Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Package / Case	Radial, Disc
Thickness (Max)-Lead Spacing0.492" (12.50mm)Lead StyleStraight	Size / Dimension	0.394" Dia (10.00mm)
Lead Spacing0.492" (12.50mm)Lead StyleStraight	Height - Seated (Max)	0.512" (13.00mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.492" (12.50mm)
Report errors?	Lead Style	Straight
		Report errors?

WKP102MCPEF0KR Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

WKP102MCPEF0KR Payment Methods



If you have any question about WKP102MCPEF0KR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com