

# WP63ID

## **WP63ID Information**





Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




**Request a Quote** 

# **WP63ID Specifications**

ManufacturerKingbrightCategoryOptoelectronicsED Indication - DiscretePackageRadialSeries-ColorRedConfiguration-Lens ColorRedLens TransparencyDiffusedMillicandela Rating2uncdVoltage - Forward (Vf) (Typ)QuantCurrent - TestOmMunufng TypeGoraWavelength - PoakagGoraWavelength - PoakagGoraPackage / CaseGarmaSpiplier Device PackageTai AdaiSupplier Device PackageTai AdaiSize / DimensionTai AdaiSize / DimensionTai AdaiSize / DimensionSize / DimensionSize / DimensionSize / DimensionSize / DimensionSize / Dimension		
Optication   Actagony Optication - Discrete   Package Radial   Package Red   Series -   Color Red   Configuration -   Lens Color Red   Lens Transparency Diffused   Millicandela Rating 12mcd   Voltage - Forward (Vf) (Typ) 2V   Current - Test 20mA   Mounting Type Gono   Mavelength - Dominant 60°   Vavelength - Peak 627nm   Features -   Package / Case Radial   Supplier Device Package T-1 3/4   Size / Dimension 6.00mm	Manufacturer Part Number	WP63ID
IndexterIndication - DiscretePackageRadialStries-ColorRedConfiguration-Lens ColorRedMillicandela RatingDiffusedJuncdRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)QuantViewing AngleGonWorten typeGonWavelength - DominantGonWavelength - PeakGonFeatures-Package / CaseSciStyplier Device Package-Styplier Device Package-Styplie	Manufacturer	Kingbright
PackageRadialSeries-ColorKedConfiguration-Lens ColorKedLens ColorKedMillicandela RatingDiffusedLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2VVoltage - Forward (Vf) (Typ)Go°Viewing Angle60°Wavelength - Dominant617nmWavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)600mm	Category	Optoelectronics
Series-ColorRedConfiguration-Lens ColorRedLens ColorDiffusedMillicandela Rating12mcdMillicandela RatingRound with Domed Top, 5mm (T-1 3/4), 5.00mmLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2VCurrent - Test20mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant617nmWavelength - Peak627nmPackage / CaseRadialSupplier Device PackageT-1 3/4Supplier Device Package-Height (Max)6.00mm		LED Indication - Discrete
ColorRedConfiguration-Lens ColorRedLens ColorDiffusedLens TransparencyDiffusedMillicandela Rating12mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2VCurrent - Test20mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant617nmWavelength - Peak627nmPackage / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)6.00mm	Package	Radial
Configuration-Lens ColorRedLens TransparencyDiffuedMillicandela Rating12mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2VCurrent - Test20mAKurent - Test0°Mounting Type60°Wavelength - Dominant617nmWavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device PackageT.1 3/4Size / Dimension6.00mm	Series	-
Lens ColorRedLens TransparencyDiffusedMillicandela Rating12mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2VCurrent - Test20mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant617nmWavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)6.00mm	Color	Red
Lens TransparencyDiffusedMillicandela Rating12mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2VCurrent - Test20mACurrent - Test60°Wounting Type61°Mounting Type617nmWavelength - Dominant627nmFeatures-Package / CaseRadialSupplier Device Package7-1 3/4Size / Dimension6.00mm	Configuration	-
Millicandela Rating12mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2VCurrent - Test20mACurrent - Test60°Mounting TypeThrough HoleMounting Type617nmWavelength - Dominant617nmWavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension6.00mm	Lens Color	Red
Lens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)2VCurrent - Test20mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant617nmWavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension6.00mm	Lens Transparency	Diffused
Voltage - Forward (Vf) (Typ)2VCurrent - Test20mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant617nmWavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)6.00mm	Millicandela Rating	12mcd
Current - Test20mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant617nmWavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device Package-13/4Size / Dimension-Height (Max)600mm	Lens Style/Size	Round with Domed Top, 5mm (T-1 3/4), 5.00mm
Viewing Angle60°Mounting TypeThrough HoleWavelength - Dominant617nmWavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)6.00mm	Voltage - Forward (Vf) (Typ)	2V
Mounting TypeThrough HoleWavelength - Dominant617nmWavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)6.00mm	Current - Test	20mA
Wavelength - Dominant617nmWavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)6.00mm	Viewing Angle	60°
Wavelength - Peak627nmFeatures-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)6.00mm	Mounting Type	Through Hole
Features-Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)6.00mm	Wavelength - Dominant	617nm
Package / CaseRadialSupplier Device PackageT-1 3/4Size / Dimension-Height (Max)6.00mm	Wavelength - Peak	627nm
Supplier Device PackageT-1 3/4Size / Dimension-Height (Max)6.00mm	Features	-
Size / Dimension-Height (Max)6.00mm	Package / Case	Radial
Height (Max) 6.00mm	Supplier Device Package	T-1 3/4
	Size / Dimension	-
Report errors?	Height (Max)	6.00mm
		Report errors?

#### **WP63ID Guarantees**

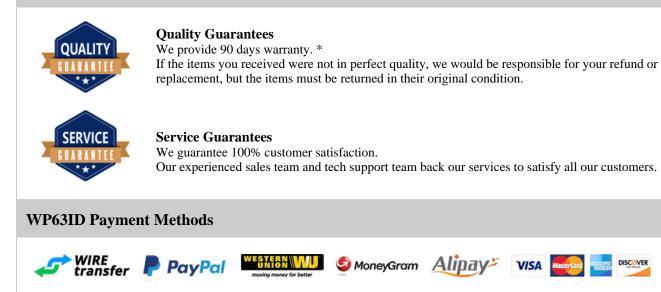

## WP63ID Shipping Methods



DISCOVER

If you have any question about WP63ID, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com