


XBUY53D

XBUY53D Information

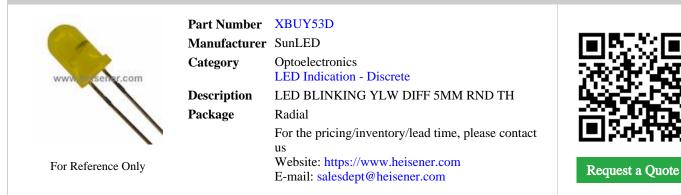

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



XBUY53D Specifications

| ManufacturerSunLEDCategoryOptoelectronicsLED Indication - DiscretePackageRadialSeries-ColorYellowConfiguration-ConfigurationYellowLens ColorYellowLens Style/SizeDiffusedMillicandela Rating19mcdVoltage - Forward (Vf) (Typ)9VCurrent - Test22mAWavelength - Peak60°Muuting TypeSt8mmWavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device Package7.1 3/4 (Smm)Size / Dimension-Height (Max)8.60mm | | |
|--|------------------------------|---|
| CategoryOptoelectronicsLED Indication - DiscretePackageRadialSeries-ColorYellowConfiguration-Lens ColorYellowLens ColorYellowLens TransparencyDiffusedMillicandela Rating19mcdVoltage - Forward (Vf) (Typ)9VCurrent - Test22mAWavelength - Dominant588nmWavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (Smm)Size / Dimension-Height (Max)8.60mm | Manufacturer Part Number | XBUY53D |
| LED Indication - DiscretePackageRadialSeries-ColorYellowConfiguration-Lens ColorYellowLens TansparencyDiffusedMillicandela Rating19mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)9VCurrent - Test22mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant588nmVavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Manufacturer | SunLED |
| PackageRadialSeries-ColorYellowConfiguration-Lens ColorYellowLens ColorYellowMillicandela RatingJiffusedMillicandela Rating19mcdVoltage - Forward (Vf) (Typ)9VVoltage - Forward (Vf) (Typ)20mAViewing Angle60°Mounting Type588mWavelength - Ponkant590mFeaturesFalshingPackage / CaseRadialSynplier Device Package7.13/4 (smm)Size / Dimension-Height (Max)8.60mm | Category | Optoelectronics |
| Series-ColorYellowConfiguration-Lens ColorYellowLens ColorDiffusedMillicandela Rating19mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)9VCurrent - Test22mANounting TypeThrough HoleWavelength - Dominant588nmWavelength - Peak590nmPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)860mm | | LED Indication - Discrete |
| ColorYellowConfiguration-Lens ColorYellowLens ColorDiffusedMillicandela Rating19mcdMillicandela RatingRound with Domed Top, 5mm (T-1 3/4), 5.00mmLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)9VCurrent - Test22mANounting TypeGo°Mounting TypeThrough HoleWavelength - Dominant588nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Package | Radial |
| Configuration-Lens ColorYellowLens TransparencyDiffusedMillicandela Rating19mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)9VCurrent - Test22mAKounding Type60°Mounting TypeThrough HoleWavelength - Dominant588nmVavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Series | - |
| Lens ColorYellowLens TransparencyDiffusedMillicandela Rating19mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)9VCurrent - Test22mACurrent - Test60°Mounting Type588nmWavelength - Dominant588nmWavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Color | Yellow |
| Lens TransparencyDiffusedMillicandela Rating19mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)9VCurrent - Test22mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant588nmWavelength - PeakFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension8.60mm | Configuration | - |
| Millicandela Rating19mcdLens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)9VCurrent - Test22mACurrent - Test60°Mounting TypeThrough HoleWavelength - Dominant588nmWavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Lens Color | Yellow |
| Lens Style/SizeRound with Domed Top, 5mm (T-1 3/4), 5.00mmVoltage - Forward (Vf) (Typ)9VCurrent - Test22mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant588nmWavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Lens Transparency | Diffused |
| Voltage - Forward (Vf) (Typ)9VCurrent - Test22mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant588nmWavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Millicandela Rating | 19mcd |
| Current - Test22mAViewing Angle60°Mounting TypeThrough HoleWavelength - Dominant588nmWavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Lens Style/Size | Round with Domed Top, 5mm (T-1 3/4), 5.00mm |
| Viewing Angle60°Mounting TypeThrough HoleWavelength - Dominant588nmWavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Voltage - Forward (Vf) (Typ) | 9V |
| Mounting TypeThrough HoleWavelength - Dominant588nmWavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Current - Test | 22mA |
| Wavelength - Dominant588nmWavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Viewing Angle | 60° |
| Wavelength - Peak590nmFeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Mounting Type | Through Hole |
| FeaturesFlashingPackage / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Wavelength - Dominant | 588nm |
| Package / CaseRadialSupplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Wavelength - Peak | 590nm |
| Supplier Device PackageT-1 3/4 (5mm)Size / Dimension-Height (Max)8.60mm | Features | Flashing |
| Size / Dimension-Height (Max)8.60mm | Package / Case | Radial |
| Height (Max) 8.60mm | Supplier Device Package | T-1 3/4 (5mm) |
| | Size / Dimension | - |
| Report errors? | Height (Max) | 8.60mm |
| | | Report errors? |

XBUY53D Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



If you have any question about XBUY53D, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com