

XLP536100.000000I

XLP536100.000000I Information

	 XLP536100.000000I IDT, Integrated Device Technology Inc Crystals, Oscillators, Resonators Oscillators OSC XO 100.000MHZ LVPECL SMD 6-SMD, No Lead For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



XLP536100.000000I Specifications

ManufacturerIDT, Integrated Device Technology IncCategoryCrystals, Oscillators, ResonatorsOscillatorsOscillatorsPackage6-SMD, No LeadSeriesXPRESSO? FXO-PC53TypeXO (Standard)Frequency100MHzFunctionEnable/DisableDutputJVPECLVoltage - Supply.3.3VFrequency Stability±25pmDerating Temperature.40°C ~ 85°CCurrent - Supply (Max)Surface MountRatings.Package / Case6-SMD, No LeadSize / Dimension6.SMD, No LeadBight - Seated (Max)0.055" (1.40mm)		
CategoryCrystals, Oscillators, ResonatorsOscillatorsPackage6-SMD, No LeadSeriesXPRESSO? FXO-PC53TypeXO (Standard)Trequency100MHzFunctionEnable/DisableDutputLVPECLVoltage - Supply3.3VFrequency Stability±25ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)120mARatings-Surface MountSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.055" (1.40mm)	Manufacturer Part Number	XLP536100.000000I
OscillatorsPackage6-SMD, No LeadSeriesXPRESSO? FXO-PC53TypeXO (Standard)Frequency100MHzFunctionEnable/DisableDutputLVPECLVoltage - Supply3.3VFrequency Stability±25ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)120mARatings-Package / Case6-SMD, No LeadBize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Manufacturer	IDT, Integrated Device Technology Inc
Package 6-SMD, No Lead Series XPRESSO? FXO-PC53 Type XO (standard) Frequency 100MHz Function Enable/Disable Dutput VVPECL Voltage - Supply 3.3V Prequency Stability ±25ppm Durpating Temperature -40°C ~ 85°C Current - Supply (Max) 120mA Ratings - Package / Case 6-SMD, No Lead Bizer / Dimension 0.203" L x 0.132" W (5.15mm x 3.35mm)	Category	Crystals, Oscillators, Resonators
SeriesXPRESSO? FXO-PC53TypeXO (Standard)Frequency100MHzFunctionEnable/DisableDutputLVPECLVoltage - Supply3.3VFrequency Stability±25ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)120mARatings-Package / Case6-SMD, No LeadSize / Dimension0.023" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)		Oscillators
TypeXO (Standard)Frequency100MHzFunctionEnable/DisableDutputLVPECLVoltage - Supply3.3VFrequency Stability±25ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)120mARatings-Package / Case6-SMD, No LeadSize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Package	6-SMD, No Lead
Frequency100MHzFunctionEnable/DisableDutputLVPECLVoltage - Supply3.3VFrequency Stability±25ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)120mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Series	XPRESSO? FXO-PC53
FunctionEnable/DisableDutputLVPECLVoltage - Supply3.3VFrequency Stability±25ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)120mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Туре	XO (Standard)
DutputLVPECLVoltage - Supply3.3VFrequency Stability±25pmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)120mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Frequency	100MHz
Yoltage - Supply3.3VFrequency Stability±25ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)120mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Function	Enable/Disable
Frequency Stability±25ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)120mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Output	LVPECL
Operating Temperature-40°C ~ 85°CCurrent - Supply (Max)120mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Voltage - Supply	3.3V
Current - Supply (Max)120mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Frequency Stability	±25ppm
Ratings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Operating Temperature	-40°C ~ 85°C
Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.203" L x 0.132" W (5.15mm x 3.35mm)Height - Seated (Max)0.055" (1.40mm)	Current - Supply (Max)	120mA
Package / Case 6-SMD, No Lead Size / Dimension 0.203" L x 0.132" W (5.15mm x 3.35mm) Height - Seated (Max) 0.055" (1.40mm)	Ratings	-
Size / Dimension 0.203" L x 0.132" W (5.15mm x 3.35mm) Height - Seated (Max) 0.055" (1.40mm)	Mounting Type	Surface Mount
Height - Seated (Max) 0.055" (1.40mm)	Package / Case	6-SMD, No Lead
	Size / Dimension	0.203" L x 0.132" W (5.15mm x 3.35mm)
Report errors?	Height - Seated (Max)	0.055" (1.40mm)
		Report errors?

XLP536100.000000I Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

XLP536100.000000I Payment Methods

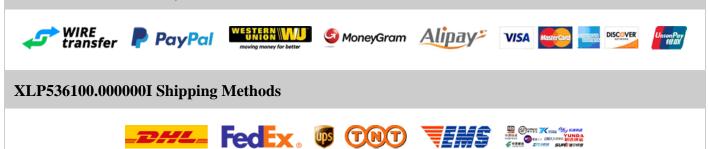

If you have any question about XLP536100.000000I, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com