

XUL535150.000JS6I8

XUL535150.000JS6I8 Information



Part Number	XUL535150.000JS6I8	
Manufacturer	IDT, Integrated Device Technology Inc	
Category	Crystals, Oscillators, Resonators Oscillators	
Description	OSC 150MHZ SMD	
Package	6-SMD, No Lead	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



XUL535150.000JS6I8 Specifications

ManufacturerIDT, Integrated Device Technology IncCategoryCrystals, Oscillators, ResonatorsOscillatorsOscillatorsPackage6-SMD, No LeadSeriesXULTypeXO (Standard)Frequency150MHzFunctionEnable/DisableOutputLVDSVoltage - Supply3.3VFrequency Stability±50ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)Surface MountRatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)		
CategoryCrystals, Oscillators, ResonatorsOscillatorsPackage6-SMD, No LeadSeriesXULTypeXO (Standard)Frequency150MHzFunctionEnable/DisableOutputLVDSVoltage - Supply3.3VFrequency Stability±50ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)97mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.047" (1.20mm)	Manufacturer Part Number	XUL535150.000JS6I8
OscillatorsPackage6-SMD, No LeadSeriesXULTypeXO (Standard)Frequency150MHzFunctionEnable/DisableOutputLVDSVoltage - Supply3.3VFrequency Stability±50ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)97mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.047" (1.20mm)	Manufacturer	IDT, Integrated Device Technology Inc
Package6-SMD, No LeadSeriesXULTypeXO (Standard)Frequency150MHzFunctionEnable/DisableOutputLVDSVoltage - Supply3.3VPrequency Stability±50ppmOperating Temperature9/mACurrent - Supply (Max)9/mARatings-Package / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)Height - Seated (Max)0.40" (1.20mm)	Category	Crystals, Oscillators, Resonators
Series XUL Type XO (Standard) Frequency 150MHz Function Enable/Disable Output LVDS Voltage - Supply 3.3V Frequency Stability ±50ppm Operating Temperature -40°C ~ 85°C Current - Supply (Max) 97mA Ratings - Mounting Type Surface Mount Package / Case 6-SMD, No Lead Size / Dimension 0.047" (1.20mm)		Oscillators
TypeXO (Standard)Frequency150MHzFunctionEnable/DisableOutputLVDSVoltage - Supply3.3VFrequency Stability±50ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)97mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.047" (1.20mm)	Package	6-SMD, No Lead
Frequency150MHzFunctionEnable/DisableOutputLVDSVoltage - Supply3.3VFrequency Stability±50ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)97mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)Height - Seated (Max)0.047" (1.20mm)	Series	XUL
FunctionEnable/DisableOutputLVDSVoltage - Supply3.3VFrequency Stability±50ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)97mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.047" (1.20mm)	Туре	XO (Standard)
OutputLVDSVoltage - Supply3.3VFrequency Stability±50pmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)97mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)Height - Seated (Max)0.047" (1.20mm)	Frequency	150MHz
Voltage - Supply3.3VStepper±50ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)97mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)Height - Seated (Max)0.047" (1.20mm)	Function	Enable/Disable
Frequency Stability±50ppmOperating Temperature-40°C ~ 85°CCurrent - Supply (Max)97mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)Height - Seated (Max)0.047" (1.20mm)	Output	LVDS
Operating Temperature-40°C ~ 85°CCurrent - Supply (Max)97mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)Height - Seated (Max)0.047" (1.20mm)	Voltage - Supply	3.3V
Current - Supply (Max)97mARatings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)Height - Seated (Max)0.047" (1.20mm)	Frequency Stability	±50ppm
Ratings-Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)Height - Seated (Max)0.047" (1.20mm)	Operating Temperature	-40°C ~ 85°C
Mounting TypeSurface MountPackage / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)Height - Seated (Max)0.047" (1.20mm)	Current - Supply (Max)	97mA
Package / Case6-SMD, No LeadSize / Dimension0.197" L x 0.126" W (5.00mm x 3.20mm)Height - Seated (Max)0.047" (1.20mm)	Ratings	-
Size / Dimension 0.197" L x 0.126" W (5.00mm x 3.20mm) Height - Seated (Max) 0.047" (1.20mm)	Mounting Type	Surface Mount
Height - Seated (Max) 0.047" (1.20mm)	Package / Case	6-SMD, No Lead
• · · · · · · · · · · · · · · · · · · ·	Size / Dimension	0.197" L x 0.126" W (5.00mm x 3.20mm)
Report errors?	Height - Seated (Max)	0.047" (1.20mm)
		Report errors?

XUL535150.000JS6I8 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

XUL535150.000JS6I8 Payment Methods

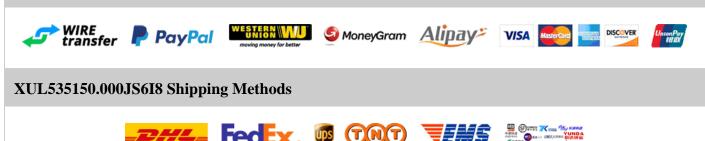



If you have any question about XUL535150.000JS6I8, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com