


Y14533K83000V0L

Y14533K83000V0L Information

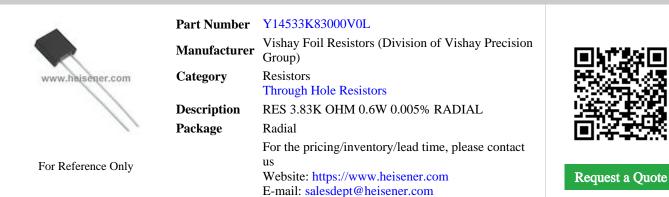

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



Y14533K83000V0L Specifications

Manufacturer Part NumberY14533K83000V0LManufacturerVishay Foil Resistors (Division of Vishay Precision Group)CategoryResistorsPackageThrough Hole ResistorsPackageRadialSeriesZResistance3.83 kOhmsTolerance±0.005%Power (Watts)0.6WCompositionMetal FoilFeaturesMoisture Resistant, Non-InductivePeatage / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Nuclear Group in the filter-Nuclear Group in the filter-Nuclear Group in the filter-State Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Nuclear Group in the filter-Nuclear Group in the filter-Nuclear Group in the filter-Nuclear Group in the filter-Stater Dimension-Nuclear Group in the filter-Nuclear Group in the filter-Nuclear Group in the filter-Stater Dimension-Nuclear Group in the filter-Nuclear Group in the filter- <t< th=""><th></th><th></th></t<>		
CategoryResistorsThrough Hole ResistorsPackagePackageRadialSeriesZResistance3.83 kOhmsTolerance±0.005%Power (Watts)0.6WCompositionMetal FoilFeaturesMoisture Resistant, Non-InductiveTemperature Coefficient±0.2ppm/°COperating Temperature-55°C ~ 125°CPackage / CaseSupplier Device PackageSize / DimensionHeight - Seated (Max)0.336" (8.53mm)	Manufacturer Part Number	Y14533K83000V0L
Through Hole ResistorsPackageRadialSeriesZResistance3.83 kOhmsTolerance±0.005%Power (Watts)0.6WCompositionMetal FoilFeaturesMoisture Resistant, Non-InductiveTemperature Coefficient±0.2ppm/°COperating Temperature55°C ~ 125°CPackage / Case.Supplier Device Package.Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)	Manufacturer	Vishay Foil Resistors (Division of Vishay Precision Group)
PackageRadialPackageRadialSeriesZResistance3.83 kOhmsTolerance±0.005%Power (Watts)0.6WCompositionMetal FoilFeaturesMoisture Resistant, Non-InductiveTemperature Coefficient±0.2ppm/°COperating Temperature-55°C ~ 125°CPackage / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)	Category	Resistors
SeriesZResistance3.83 kOhmsTolerance±0.005%Power (Watts)0.6WCompositionMetal FoilFeaturesMoisture Resistant, Non-InductiveTemperature Coefficient±0.2ppm°COperating Temperature-55°C ~ 125°CPackage / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)		Through Hole Resistors
Resistance3.83 kOhmsTolerance±0.005%Power (Watts)0.6WCompositionMetal FoilFeaturesMoisture Resistant, Non-InductiveTemperature Coefficient±0.2ppm/°COperating Temperature-55°C ~ 125°CPackage / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)	Package	Radial
Tolerance±0.005%Power (Watts)0.6WCompositionMetal FoilFeaturesMoisture Resistant, Non-InductiveTemperature Coefficient±0.2ppm/°COperating Temperature-55°C ~ 125°CPackage / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)	Series	Z
Power (Watts)0.6WCompositionMetal FoilFeaturesMoisture Resistant, Non-InductiveTemperature Coefficient±0.2ppm/°COperating Temperature-55°C ~ 125°CPackage / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)	Resistance	3.83 kOhms
CompositionMetal FoilFeaturesMoisture Resistant, Non-InductiveTemperature Coefficient±0.2ppm/°COperating Temperature-55°C ~ 125°CPackage / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)	Tolerance	$\pm 0.005\%$
FeaturesMoisture Resistant, Non-InductiveTemperature Coefficient±0.2ppm/°COperating Temperature-55°C ~ 125°CPackage / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)	Power (Watts)	0.6W
Temperature Coefficient±0.2ppm/°COperating Temperature-55°C ~ 125°CPackage / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)	Composition	Metal Foil
Operating Temperature-55°C ~ 125°CPackage / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)	Features	Moisture Resistant, Non-Inductive
Package / CaseRadialSupplier Device Package-Size / Dimension0.300" L x 0.105" W (7.62mm x 2.67mm)Height - Seated (Max)0.336" (8.53mm)	Temperature Coefficient	±0.2ppm/°C
Supplier Device Package - Size / Dimension 0.300" L x 0.105" W (7.62mm x 2.67mm) Height - Seated (Max) 0.336" (8.53mm)	Operating Temperature	-55°C ~ 125°C
Size / Dimension 0.300" L x 0.105" W (7.62mm x 2.67mm) Height - Seated (Max) 0.336" (8.53mm)	Package / Case	Radial
Height - Seated (Max) 0.336" (8.53mm)	Supplier Device Package	-
	Size / Dimension	0.300" L x 0.105" W (7.62mm x 2.67mm)
	Height - Seated (Max)	0.336" (8.53mm)
Number of Terminations 2	Number of Terminations	2
Failure Rate -	Failure Rate	-
Report erro		Report errors?

Y14533K83000V0L Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

Y14533K83000V0L Payment Methods





If you have any question about Y14533K83000V0L, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com