


## YC164-FR-07226RL

#### YC164-FR-07226RL Information

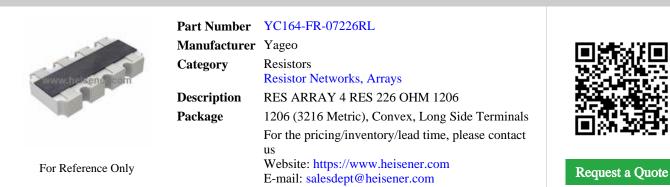

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### YC164-FR-07226RL Specifications

Manufacturer Part NumberYC164+FR-07226RLManufacturerYageoCategoryResistorsPackageResistor Networks, ArraysPackage1206 (3216 Metric), Convex, Long Side TerminalsSeriesYC164Circuit TypeIsolardCircuit TypeIsolardPackage (Ohms)226Tolerance±1%Number of Resistors4Number of Pins8Power Per Element62.5mWOperating Temperaturee.5v°C ~ 155°CApplicationsDDRAM, SDRAMMouning TypeSurface MountSurface Mount2.06(3216 Metric), Convex, Long Side TerminalsSupplier Device Package.Size / Dimension0.16t° L x 0.063° W (3.20mm x 1.60mm)Height Seated (Max).Manufacture.Size / Dimension.Manufacture.Size / Dimension.Manufacture.Manufacture.Manufacture.Manufacture.Manufacture.Manufacture<		
CategoryResistorsResistor Networks, ArraysPackage1206 (3216 Metric), Convex, Long Side TerminalsSeriesVC164Circuit TypeIsolatedResistance (Ohms)226Tolerance±1%Number of Resistors4Number of Pins8Power Per Element62.5mWOperating Temperature-55°C ~ 155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126° L x 0.063° W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.7mm)	Manufacturer Part Number	YC164-FR-07226RL
Resistor Networks, ArraysPackage1206 (3216 Metric), Convex, Long Side TerminalsSeriesYC164Circuit TypeIsolatedResistance (Ohms)226Tolerance±1%Number of Resistors4Number of Pins8Power Per Element62.5mWTemperature Coefficient±200pm/°COperating Temperature55°C ~ 155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case.Supplier Device Package.Size / Dimension0.126° L x 0.063° W (3.20mm x 1.60mm)Height - Seated (Max)0.028° (0.70mm)	Manufacturer	Yageo
Package1206 (3216 Metric), Convex, Long Side TerminalsSeriesYC164Circuit TypeIsolatedResistance (Ohms)226Tolerance±1%Number of Resistors4Number of Pins8Power Per Element62.5mWTemperature Coefficient±200pm/°COperating Temperature55°C ~ 155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Category	Resistors
SeriesYC164Circuit TypeIsolatedResistance (Ohms)226Tolerance±1%Number of Resistors4Number of Resistors8Power Per Element62.5mWTemperature Coefficient±200ppm/°COperating Temperature-55°C ~155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)		Resistor Networks, Arrays
Circuit TypeIsolatedResistance (Ohms)226Tolerance±1%Number of Resistors4Number of Pins8Power Per Element62.5mWTemperature Coefficient±200ppm/°COperating Temperature>55°C ~ 155°CApplicationsDDRAM, SDRAMMounting Type1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Package	1206 (3216 Metric), Convex, Long Side Terminals
Resistance (Ohms)226Tolerance±1%Number of Resistors4Number of Resistors8Power Per Element62.5mWTemperature Coefficient±200ppm/°COperating Temperature-55°C ~ 155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case.Supplier Device Package.Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Series	YC164
Tolerance±1%Number of Resistors4Number of Pins8Power Per Element62.5mWTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Circuit Type	Isolated
Number of Resistors4Number of Pins8Power Per Element62.5mWTemperature Coefficient±200ppm/°COperating Temperature-55°C ~ 155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Resistance (Ohms)	226
Number of Pins8Power Per Element62.5mWTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Tolerance	$\pm 1\%$
Power Per Element62.5mWTemperature Coefficient±200ppm/°COperating Temperature-55°C ~ 155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Number of Resistors	4
Temperature Coefficient±200ppm/°COperating Temperature-55°C ~ 155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Number of Pins	8
Operating Temperature-55°C ~ 155°CApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Power Per Element	62.5mW
ApplicationsDDRAM, SDRAMMounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Temperature Coefficient	±200ppm/°C
Mounting TypeSurface MountPackage / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Operating Temperature	-55°C ~ 155°C
Package / Case1206 (3216 Metric), Convex, Long Side TerminalsSupplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Applications	DDRAM, SDRAM
Supplier Device Package-Size / Dimension0.126" L x 0.063" W (3.20mm x 1.60mm)Height - Seated (Max)0.028" (0.70mm)	Mounting Type	Surface Mount
Size / Dimension 0.126" L x 0.063" W (3.20mm x 1.60mm)   Height - Seated (Max) 0.028" (0.70mm)	Package / Case	1206 (3216 Metric), Convex, Long Side Terminals
Height - Seated (Max) 0.028" (0.70mm)	Supplier Device Package	-
• • • • • • • • • • • • • • • • • • •	Size / Dimension	0.126" L x 0.063" W (3.20mm x 1.60mm)
Report errors?	Height - Seated (Max)	0.028" (0.70mm)
		Report errors?

#### YC164-FR-07226RL Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### YC164-FR-07226RL Payment Methods





If you have any question about YC164-FR-07226RL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com