



Multilayer Balun

For 1920-2170MHz

HHM1534

2.0×1.25mm [EIA 0805]*

* Dimensions Code JIS[EIA]




Conformity to RoHS Directive

Multilayer Balun


For 1920-2170MHz

HHM1534

SHAPES AND DIMENSIONS

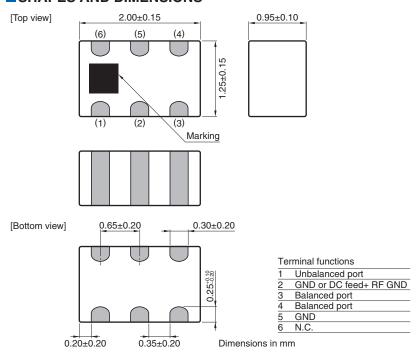

■ RECOMMENDED LAND PATTERN



OROHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



HHM1534

ELECTRICAL CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Тур.	Max.	
Unbalanced Port Characteristic Impedance (Ω)		50 (Nominal)			
Balanced Port Characteristic Impedance (Ω)		200 (Nominal)			
Return Loss at Unbalanced Port (dB)	1920 to 1980	10	_	_	
Therain Loss at Oribalanced Fort (db)	2110 to 2170				
Phase Balance (deg.)	1920 to 1980	170	_	190	
Thase balance (deg.)	2110 to 2170				
Amplitude Balance (dB)	1920 to 1980	-2.0	_	2.0	
Amplitude Balance (db)	2110 to 2170				
Inscrition Loss (dP)	1920 to 1980	_	_	1.0	
Insertion Loss (dB)	2110 to 2170				

TEMPERATURE RANGE

Operating temperature	Storage temperature		
(°C)	(°C)		
-40 to +85	-40 to +85		


All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.




HHM1534

FREQUENCY CHARACTERISTICS


□INSERTION LOSS




_AMPLITUDE BALANCE



RETURN LOSS

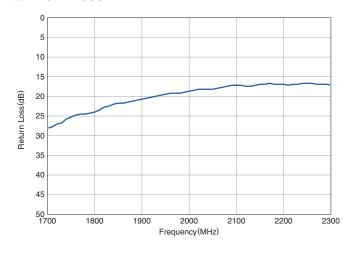

□PHASE BALANCE




[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



■ RECOMMENDED REFLOW PROFILE

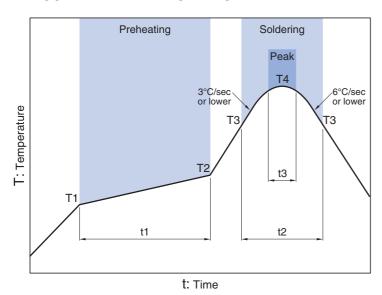

Preheating —			Soldering Critical zon	Soldering Critical zone (T3 to T4) Peak			
Temp.		Time	Temp.	Time	Temp.	Time	
T1	T2	t1	T3	t2	T4	t3*	
150°C	200°C	60 to 120sec	217°C	60 to 120sec	240 to 260°C	30sec max.	

^{*}t3: Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.