

Is Now Part of



# **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="https://www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="https://www.onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized applications, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an equif prese



January 2015

# FSA839 — Low-Voltage, 0.8 $\Omega$ SPDT Analog Switch with Power-Off Isolation

Description

make operation.

The FSA839 is a high-performance Single-Pole /

Double-Throw (SPDT) analog switch for audio

applications driven by low-voltage (1.8 V) baseband processors or ASICs. The device features ultra-low  $R_{ON}$ 

of 0.8  $\Omega$  (maximum) at 4.5 V V<sub>CC</sub> and operates over the

wide  $V_{CC}$  range of 1.65 V to 5.5 V. The device is fabricated with sub-micron CMOS technology to achieve

fast switching speeds and is designed for break-before-

The FSA839 interfaces between the low-voltage ASIC

and regular audio amplifiers and CODECs operating up to a 5.5 V supply range. The control circuitry allows for

1.8 V (typical) signals on the control pin (Sel).

#### Features

- Power-Off Isolation (V<sub>CC</sub>=0 V)
- = 0.8  $\Omega$  Maximum On Resistance (R<sub>ON</sub>) for 4.5 V V<sub>CC</sub>
- 0.25 Ω Maximum R<sub>ON</sub> Flatness for 4.5 V V<sub>CC</sub>
- Broad V<sub>CC</sub> Operating Range: 1.65 V to 5.5 V
- Fast Turn-On and Turn-Off Times
- Control Input Switching Thresholds Independent of V<sub>CC</sub>
- Break-Before-Make Enable Circuitry
- 0.4 mm WLCSP Packaging
- ESD Performance
  - HBM per JESD22-A114, I/O to GND: 8 kV
  - CDM per JESD22-C101: 500 V
  - IEC61000-4-2 Contact / Air: 8 kV / 15 kV


#### Applications

- Cellular Phone
- Portable Media Player
- PDA


#### **Ordering Information**

Part Number	Operating Temperature Range	Top Mark	Package	Packing Method
FSA839UCX	-40°C to +85°C	N3	6-Ball WLCSP, 0.4 mm Pitch	Tape and Reel

Ø For Fairchild's definition of "green" Eco Status, please visit: <u>http://www.fairchildsemi.com/company/green/rohs\_green.html.</u>





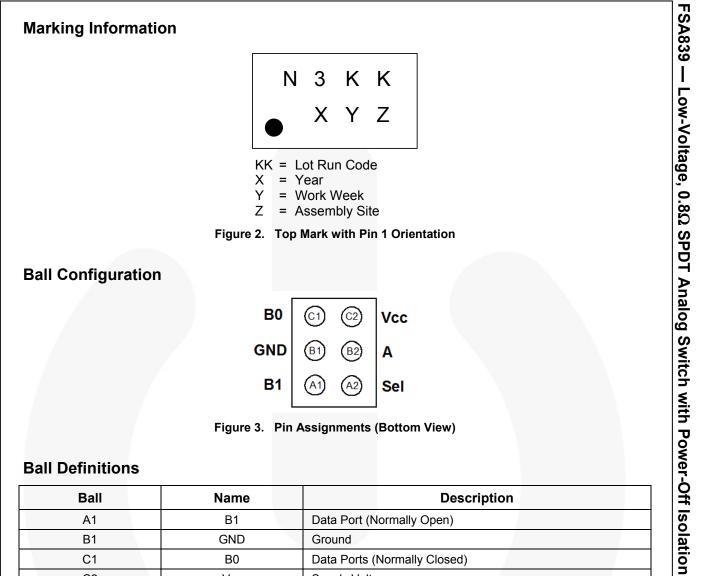

Ball	Name	Description
A1	B1	Data Port (Normally Open)
B1	GND	Ground
C1	B0	Data Ports (Normally Closed)
C2	V <sub>cc</sub>	Supply Voltage
B2	A	Common Data Port
A2	Sel	Control Input

### **Truth Table**

Control Input (Sel)	Function
LOW	B0 connected to A
HIGH	B1 connected to A

2

## **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter		Min.	Max.	Unit
V <sub>CC</sub>	Supply Voltage		-0.5	6.5	V
V <sub>SW</sub>	Switch Voltage <sup>(1)</sup>		-0.5	V <sub>CC</sub> + 0.5	V
V <sub>IN</sub>	Input Voltage <sup>(1)</sup>		-0.5	6.5	V
I <sub>IK</sub>	Input Diode Current			-50	mA
I <sub>SW</sub>	Switch Current (Continuous)			200	mA
I <sub>SWPEAK</sub>	Peak Switch Current (Pulsed at 1 ms Duration, <10%	% Duty Cycle)		400	mA
PD	Power Dissipation at 85°C			180	mW
T <sub>STG</sub>	Storage Temperature Range		-65	+150	°C
TJ	Maximum Junction Temperature			+150	°C
TL	Lead Temperature (Soldering, 10 Seconds)			+260	°C
	Human Bady Madal (JEDEC: JECD22 A114)	I/O to GND: A		8	
	Human Body Model (JEDEC: JESD22-A114)	All Pins		2	kV
ESD	Charged Device Model (JEDEC: JESD22-C101)			500	V
ESD	Machine Model (JEDEC: JESD22-A115)			100	V
	IEC6100-4-2 Discharge System Test Performed on	Contact		8	kV
	Fairchild's FSA859 Applications Testing Board	Air		15	κV

Note:

1. The input and output negative ratings may be exceeded if the input and output diode current ratings are observed.

#### **Recommended Operating Conditions**

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Min.	Max.	Unit
V <sub>cc</sub>	Supply Voltage	1.65	5.50	V
SEL	Control Input Voltage	0	1.95	V
V <sub>sw</sub>	Switch Input Voltage	0	V <sub>cc</sub>	V
T <sub>A</sub>	Operating Temperature	-40	+85	°C
$\theta_{JA}$	Thermal Resistance, Still Air		350	°C/W

FSA839 —
Low-\
/oltage, 0.8Ω SPDT /
S
alog Switch w
h with Po
with Power-Off Isolati
solation

### **DC Electrical Characteristics**

All typical values are at 25°C unless otherwise specified.

Symbol	Parameter	V <sub>cc</sub> (V)	V <sub>cc</sub> (V) Conditions		<sub>A</sub> =+25°	с	T <sub>A</sub> =-40 to +85°C		Unit
-,		- 00 (- )		Min.	Тур.	Max.	Min.	Max.	
V <sub>IH</sub>	Input Voltage High	1.65 to 5.50					1.0		V
V <sub>IL</sub>	Input Voltage Low	1.65 to 5.50						0.57	V
I <sub>IN</sub>	Control Input Leakage	1.95 to 5.50	V <sub>Sel</sub> =0	-2		2	-20	20	nA
		5.50	A=1 V, 4.5 V B0 or B1=4.5, 1 V	-10		10	-50	50	
I <sub>NO(0FF),</sub>	Off-Leakage	3.60	A=1 V, 3.0V B0 or B1=3.0, 1V	-10		10	-50	50	
I <sub>NC(OFF)</sub> ,	Current of Port B0 and B1 <sup>(5)</sup>	2.70	A=0.5 V, 2.3 V B0 or B1=2.3, 0.5V	-10		10	-50	50	nA
		1.95	A=0.3 V, 1.65 V B0 or B1=1.65 ,0.3 V	-5		5	-20	20	
		5.50	A=Floating B0 or B1=4.5, 1V	-20		20	-100	100	
I <sub>NO(On),</sub>	On-Leakage Current of Port B0	3.60	A=Floating B0 or B1=3.0, 1 V	-10		10	-20	20	20 nA
1 Our	and B1 <sup>(5)</sup>	2.70	A=Floating B0 or B1=2.3, 0.5 V	-10		10	-20	20	
		1.95	A=Floating B0 or B1=1.65, 0.3 V	-5		5	-20	20	
		5.50	A=1 V, 4.5 V; B0 or B1=1 V, 4.5 V, or Floating	-20		20	-100	100	
	On Leakage	3.60	A=1V, 3.0VB0 or B1=1V, 3.0V, or Floating	-10		10	-20	20	
I <sub>A(ON)</sub>	Current of Port A <sup>(5)</sup>	2.70	A=0.5 V, 2.3 V, B0 or B1=0.5 V, 2.3 V, or Floating	-10		10	-20	20	nA
		1.95	A=0.3 V, 1.65 V; B0 or B1=0.3 V, 1.65 V, or Floating	-5		5	-20	20	
I <sub>OFF</sub>	Power Off Leakage Current of Port A & Port B <sup>(5)</sup>	0	A=0 to 5.5 V B0 or B1=0 to 5.5 V	-1.00	0.01	1.00	-5.00	5.00	μA
$R_{PD}$	Sel Internal Pull- Down Resistor	1.65 to 1.95			2.0				MΩ
		5.50	$V_{IN}$ , $V_{SEL}$ =0 or $V_{CC}$ , $I_{OUT}$ =0			100		500	μA MΩ
1	Quiescent Supply	3.60	$V_{IN}$ , $V_{SEL}$ =0 or $V_{CC}$ , $I_{OUT}$ =0			75		300	
I <sub>CC</sub>	Current	2.70	$V_{IN}$ , $V_{SEL}$ =0 or $V_{CC}$ , $I_{OUT}$ =0			50		250	nA
		1.95	$V_{IN}$ , $V_{SEL}$ =0 or $V_{CC}$ , $I_{OUT}$ =0			25		150	

www.fairchildsemi.com

### DC Electrical Characteristics (Continued)

All typical values are at 25°C unless otherwise specified.

Ourseland	Demonstern	V 00	Qanditiana		T <sub>A</sub> =+25°	С	T <sub>A</sub> =-40 to +85°C		llmit
Symbol	Parameter	V <sub>cc</sub> (V)	Conditions	Min.	Тур.	Max.	Min.	Max.	Unit
		5.50	V <sub>Sel</sub> = 1.8 V		26	40		50	
Increase in I <sub>CC</sub> per Control Input	3.60	V <sub>Sel</sub> = 1.8 V		5	15		20	μA	
	2.70	V <sub>Sel</sub> = 1.8 V		1	5		10	μΑ	
		1.95	V <sub>Sel</sub> = 1.8 V		0.01	1.00		3.00	
I <sub>CCZ</sub>	Supply Current Sleep	5.50	$V_{IN}$ , $V_{Sel}$ = Floating			0.5		1.0	μA
R <sub>ON</sub> Switch On Resistance <sup>(2,5)</sup>	4.50	I <sub>OUT</sub> =-100 mA, B0 or B1=2.5 V		0.50	0.75		0.80		
	3.00	I <sub>OUT</sub> =-100 mA, B0 or B1=2.0 V		0.75	0.90		1.20	Ω	
	2.25	I <sub>OUT</sub> =-100 mA, B0 or B1=1.8 V		1.0	1.3		1.6	12	
		1.65	I <sub>OUT</sub> =-100 mA, B0 or B1=1.2 V		2.5	5.0		7.0	
		4.50	I <sub>OUT</sub> =-100 mA, B0 or B1=2.5 V		0.05	0.10		0.10	Ω
	On Resistance Matching	3.00	I <sub>OUT</sub> =-100 mA, B0 or B1=2.0 V		0.10	0.15		0.15	
$\Delta R_{ON}$	Between Channels <sup>(3,5)</sup>	2.25	I <sub>OUT</sub> =-100 mA, B0 or B1=1.8 V		0.15	0.20		0.20	
		1.65	I <sub>OUT</sub> =-100 mA, B0 or B1=1.2 V		0.15	0.40		0.40	
		4.50	I <sub>OUT</sub> =-100 mA, B0 or B1=1.0V, 1.5 V, 2.5 V		0.075	0.250		0.250	
Р	On Resistance	3.00	I <sub>OUT</sub> =-100 mA, B0 or B1=0.8 V, 2.0 V		0.1	0.3		0.3	
R <sub>FLAT(ON)</sub>	Flatness <sup>(4,5)</sup>	2.25	I <sub>OUT</sub> =-100 mA, B0 or B1=0.8 V, 1.8 V		0.25	0.50		0.60	Ω
		1.65	I <sub>OUT</sub> =-100mA, B0 or B1=0.6 V, 1.2 V		3.5				

FSA839 — Low-Voltage, 0.8Ω SPDT Analog Switch with Power-Off Isolation

Notes:

2. On resistance is determined by the voltage drop between A and B pins at the indicated current through the switch.

3.  $\Delta R_{ON} = R_{ON}$  maximum –  $R_{ON}$  minimum; measured at identical V<sub>CC</sub>, temperature, and voltage.

4. Flatness is defined as the difference between the maximum and minimum value of on resistance over the specified range of conditions.

5. Guaranteed by characterization, not production tested for  $V_{CC}$ =1.65 – 1.95 V.

Symbol Parameter	V <sub>cc</sub> (V)	Conditions	T <sub>A</sub> =+25⁰C			T <sub>A</sub> =-40 to +85°C		Unit	Figure	
			Min.	Тур.	Max.	Min.	Max.		-	
		4.50 to 5.50		1.0	12.0	25.0	1.0	30.0		
	Turn-On	3.00 to 3.60	B0 or B1=V <sub>CC</sub> ,	5.0	15.0	30.0	3.0	35.0		Figure
t <sub>ON</sub>	Time <sup>(6)</sup>	2.30 to 2.70	R <sub>L</sub> =50 Ω, C <sub>L</sub> =35 pF	5.0	20.0	35.0	5.0	40.0	ns	4
		1.65 to 1.95		10.0	50.0	70.0	10.0	75.0		
		4.50 to 5.50		1.0	9.5	20.0	1.0	25.0		
		3.00 to 3.60	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	1.0	9.0	20.0	1.0	25.0		
$t_{OFF}$	Turn-Off Time <sup>(6)</sup>	2.30 to 2.70		2.0	10.0	20.0	2.0	25.0	ns	Figure 4
		1.65 to 1.95		2.0	50.0					
_		4.50 to 5.50		1.0	10.0	12.0	0.1	14.0		
	Break- Before-	3.00 to 3.60	B0 or B1=V <sub>CC</sub> /2,	1.0 14.0 16.0 1.0 17.0	or B1=V <sub>CC</sub> /2, 1.0 14.0 16.0 1.0 17.0	1	Figure			
<sup>т<sub>ввм</sub> Маке</sup>	2.30 to 2.70	- R <sub>L</sub> =50 Ω, C <sub>L</sub> =35 pF	1.0	21.0	25.0	1.0	27.0	ns	5	
	Time <sup>(7)</sup>	1.65 to 1.95			35.0		2.0	50.0	-	
		5.50			70					
	Charge	3.30	C <sub>L</sub> =1.0 nF,		40					Figure
Q	Injection	2.50	V <sub>GEN</sub> =0 V, R <sub>GEN</sub> =0 Ω		30				рС	7
		1.65	GEN 0 11		10					
OIRR	Off Isolation	1.8 to 5.0	f=1 MHz, R <sub>L</sub> =50 Ω		-55				dB	Figure 6
Xtalk	Crosstalk	1.8 to 5.0	f=1 MHz, R <sub>L</sub> =50 Ω		55				dB	Figure 6
		5.50			60					
	-3 db	3.30	D -50 0		60					Figure
BW	Bandwidth	2.50	R <sub>L</sub> =50 Ω		55				MHz	9
		1.65			50	50	6			
	Total	1.80	R <sub>L</sub> =600 Ω, V <sub>IN</sub> =0.5 V <sub>PP</sub> ,		.02					Figure 10
THD	Harmonic Distortion	5.00	f=20 Hz to 20 kHz		.001				%	
PSRR	Power Supply Rejection Ratio	3.3	f=217 Hz on V <sub>CC</sub> at 500 mvpp		-23				dB	Figure 11


Notes:


Guaranteed by characterization, not production tested for  $V_{CC}$ =1.65 – 1.95 V. Guaranteed by characterization, not production tested. 6.

7.

#### Capacitance


Symbol	Parameter		Conditions	-	Г <sub>А=</sub> +25°С		Unit
Symbol	Farameter	V <sub>cc</sub> (V)	Conditions	Min.	Тур.	Max.	Unit
CIN	Control Pin Input Capacitance	0	f=1 MHz		3.2		pF
C <sub>OFF</sub>	B Port Off Capacitance	1.65 to 5.50	f=1 MHz		50		pF
C <sub>ON</sub>	A Port On Capacitance	1.65 to 5.50	f=1 MHz		150		pF

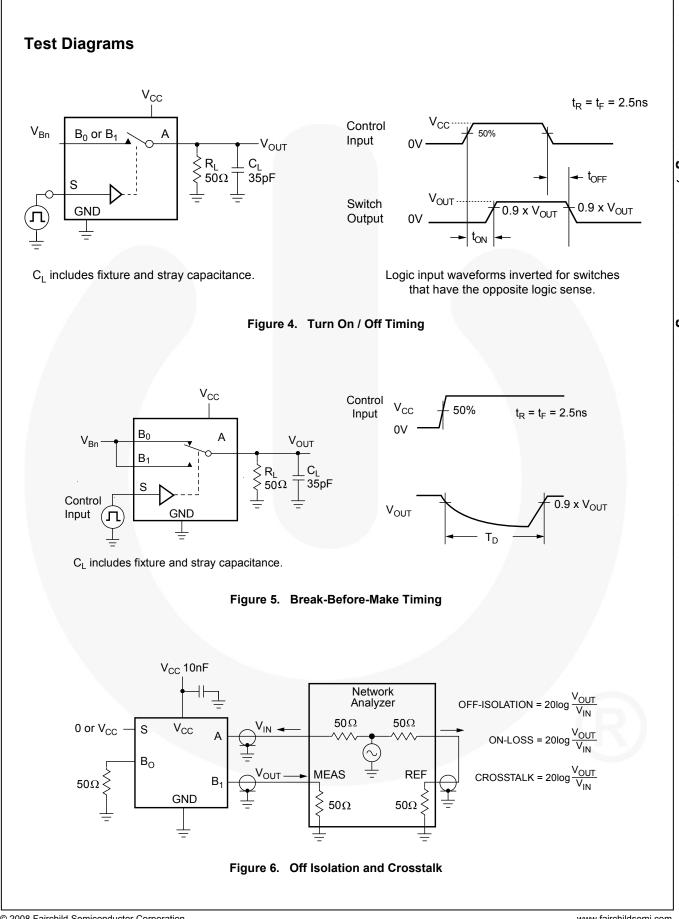

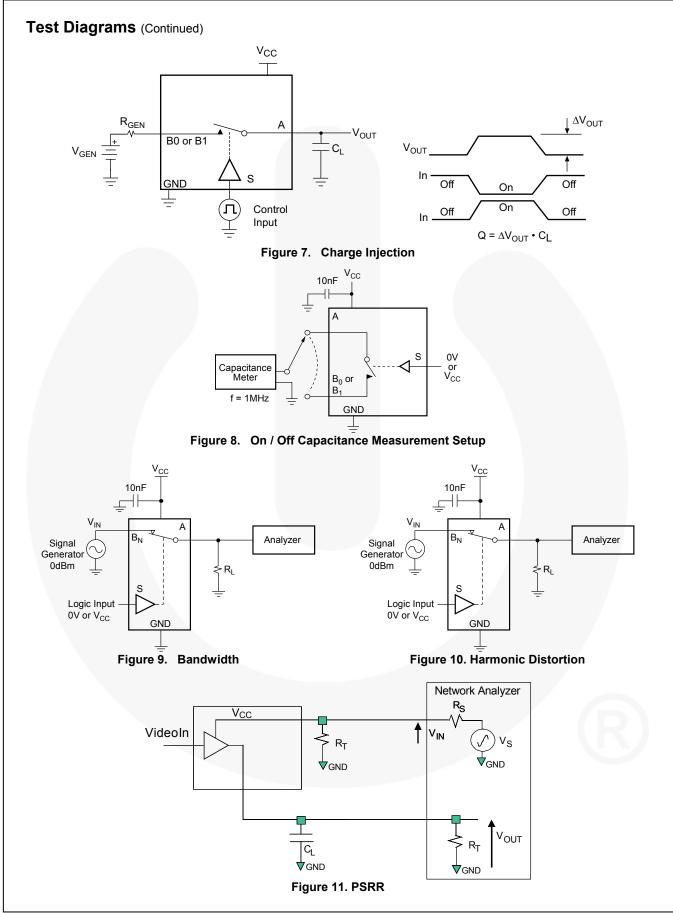

FSA839 — Low-Voltage, 0.8Ω SPDT Analog Switch with Power-Off Isolation

Product	D	E	X	Y
FSA839UCX	1.160 ±.030	0.760 ±.030	0.180	0.180

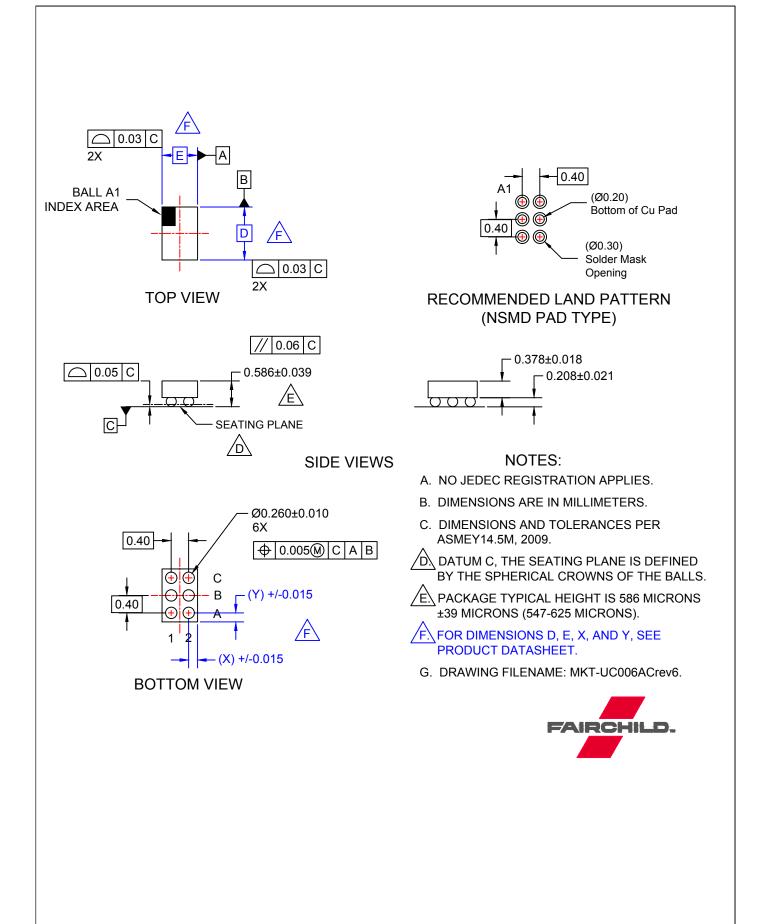

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly ori indirectly, any claim of personal injury or death

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC