



### **FEATURES**

- Member of the Texas Instruments Widebus™
   Family
- Bus Hold on Data Inputs Eliminates the Need for External Pullup/Pulldown Resistors
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)

### **DESCRIPTION/ORDERING INFORMATION**

This 1-bit to 4-bit address driver is designed for 1.65-V to 3.6-V  $V_{\rm CC}$  operation.

The SN74ALVCH16344 is used in applications in which four separate memory locations must be addressed by a single address.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

Active bus-hold circuitry holds unused or undriven inputs at a valid logic state. Use of pullup or pulldown resistors with the bus-hold circuitry is not recommended.

# DGG OR DL PACKAGE (TOP VIEW)

			1
OE1	1	O 56	OE4
1B1	2	55	]8B1
1B2	<b>[</b> ]3	54	8B2
GND	4	53	GND
1B3	5	52	8B3
1B4	6	51	8B4
$V_{CC}$	7	50	$V_{cc}$
1A	8	49	8A
2B1	9	48	]7B1
2B2	10	47	7B2
GND	11	46	GND
2B3	12	45	7B3
2B4	13	44	7B4
2A	14	43	]7A
3A	15	42	]6A
3B1	16	41	6B1
3B2	17	40	]6B2
GND	18	39	]GND
3B3	19	38	6B3
3B4	20	37	]6B4
4A	21	36	]5A
$V_{CC}$	22	35	]v <sub>cc</sub>
4B1	23	34	]5B1
4B2	24	33	]5B2
GND	25	32	]GND
4B3	26	31	]5B3
4B4	27	30	]5B4
OE2	28	29	OE3
			•

#### ORDERING INFORMATION

T <sub>A</sub>	PACK	AGE <sup>(1)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	SSOP - DL	Tube	SN74ALVCH16344DL	ALVCH16344
-40°C to 85°C	330P - DL	Tape and reel	SN74ALVCH16344DLR	ALVON10344
	TSSOP - DGG	Tape and reel	SN74ALVCH16344DGGR	ALVCH16344

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

### **FUNCTION TABLE**


INP	UTS	OUTPUT
ŌĒ	Α	Bn
L	Н	Н
L	L	L
Н	Н	Z

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus is a trademark of Texas Instruments.



# **LOGIC DIAGRAM (POSITIVE LOGIC)**

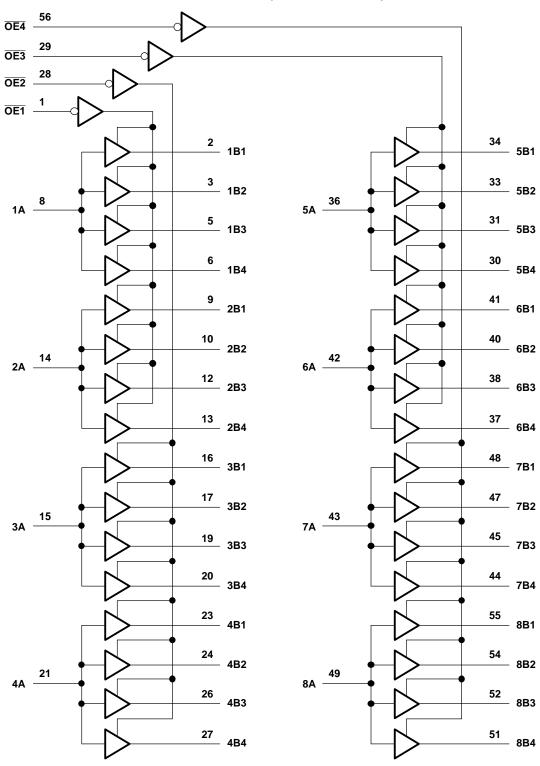



# SN74ALVCH16344 1-BIT TO 4-BIT ADDRESS DRIVER WITH 3-STATE OUTPUTS

# ABSOLUTE MAXIMUM RATINGS(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range	Supply voltage range			
VI	Input voltage range <sup>(2)</sup>		-0.5	4.6	V
Vo	Output voltage range <sup>(2)(3)</sup>		-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		-50	mA
Io	Continuous output current			±50	mA
	Continuous current through each V <sub>CC</sub> or GN	ס		±100	mA
0	Declare the real importance (4)	DGG package		64	00/11/
$\theta_{JA}$	Package thermal impedance (4)	DL package		56	°C/W
T <sub>stg</sub>	Storage temperature range		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- (2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) This value is limited to 4.6 V maximum.
- (4) The package thermal impedance is calculated in accordance with JESD 51-7.

# RECOMMENDED OPERATING CONDITIONS(1)

			MIN	MAX	UNIT	
V <sub>CC</sub>	Supply voltage		1.65	3.6	V	
		V <sub>CC</sub> = 1.65 V to 1.95 V	$0.65 \times V_{CC}$			
$V_{IH}$	High-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	1.7		V	
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$	2			
		V <sub>CC</sub> = 1.65 V to 1.95 V		$0.35 \times V_{CC}$		
$V_{IL}$	Low-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		0.7	V	
		V <sub>CC</sub> = 2.7 V to 3.6 V		0.8		
VI	Input voltage	,	0	$V_{CC}$	V	
Vo	Output voltage		0	$V_{CC}$	V	
	High hard automorph	V <sub>CC</sub> = 1.65 V		-4		
		High level cutout current	High lovel output current	V <sub>CC</sub> = 2.3 V		-12
I <sub>OH</sub>	High-level output current	High-level output current		-12	MA	
				-24		
		V <sub>CC</sub> = 1.65 V		4		
	Low level output ourrent	V <sub>CC</sub> = 2.3 V		12	A	
I <sub>OL</sub> Lov	Low-level output current	V <sub>CC</sub> = 2.7 V		12	mA	
		V <sub>CC</sub> = 3 V		24		
Δt/Δν	Input transition rise or fall rate			10	ns/V	
T <sub>A</sub>	Operating free-air temperature		-40	85	°C	

All unused control inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.





### **ELECTRICAL CHARACTERISTICS**

over recommended operating free-air temperature range (unless otherwise noted)

Р	ARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN	TYP <sup>(1)</sup>	MAX	UNIT
		I <sub>OH</sub> = -100 μA	1.65 V to 3.6 V	V <sub>CC</sub> - 0.2			
		$I_{OH} = -4 \text{ mA}$	1.65 V	1.2			
		I <sub>OH</sub> = -6 mA	2.3 V	2			
$V_{OH}$			2.3 V	1.7			V
		I <sub>OH</sub> = -12 mA	2.7 V	2.2			
			3 V	2.4			
		I <sub>OH</sub> = -24 mA	3 V	2			
		I <sub>OL</sub> = 100 μA	1.65 V to 3.6 V			0.2	
		I <sub>OL</sub> = 4 mA	1.65 V			0.45	
.,		I <sub>OL</sub> = 6 mA	2.3 V			0.4	.,
$V_{OL}$		10 10	2.3 V			0.7	V
	I <sub>OL</sub> = 12 mA	2.7 V			0.4		
		I <sub>OL</sub> = 24 mA	3 V			0.55	
I		$V_I = V_{CC}$ or GND	3.6 V			±5	μΑ
		V <sub>I</sub> = 0.58 V	1.65 V	25			
		V <sub>I</sub> = 1.07 V	1.65 V	-25			
		V <sub>I</sub> = 0.7 V	2.3 V	45			
I <sub>I(hold)</sub>		V <sub>I</sub> = 1.7 V	2.3 V	-45			μΑ
, ,		V <sub>I</sub> = 0.8 V	3 V	75			
		V <sub>I</sub> = 2 V	3 V	-75			
		$V_I = 0 \text{ to } 3.6 \text{ V}^{(2)}$	3.6 V			±500	
loz		$V_O = V_{CC}$ or GND	3.6 V			±10	μΑ
I <sub>CC</sub>		$V_I = V_{CC}$ or GND, $I_O = 0$	3.6 V			40	μΑ
$\Delta I_{CC}$		One input at V <sub>CC</sub> - 0.6 V, Other inputs at V <sub>CC</sub> or GND	3 V to 3.6 V			750	μΑ
	Control inputs	V V CND	221/		2.5		pF
C <sub>i</sub>	Data inputs	$V_{I} = V_{CC}$ or GND	3.3 V		3.5		
Co	Outputs	$V_O = V_{CC}$ or GND	3.3 V		4		pF

### **SWITCHING CHARACTERISTICS**

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)


PARAMETER	FROM TO (OUTPUT)		V <sub>CC</sub> = 1.8 V	V <sub>CC</sub> = 2 ± 0.2	2.5 V V	V <sub>CC</sub> = 2	2.7 V	V <sub>CC</sub> = 3 ± 0.3	3.3 V V	UNIT
	(INFOT)	(001701)	TYP	MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>pd</sub>	A	В	(1)	1	4.6		4.6	1.4	4	ns
t <sub>en</sub>	ŌĒ	В	(1)	1	6.2		6.2	1.2	5.1	ns
t <sub>dis</sub>	ŌĒ	В	(1)	1	5.1		4.4	1.2	4	ns
t <sub>sk(o)</sub> (2)									0.35	ns
t <sub>sk(o)</sub> (3)									0.5	ns

This information was not available at the time of publication.

All typical values are at  $V_{CC}$  = 3.3 V,  $T_A$  = 25°C. This is the bus-hold maximum dynamic current. It is the minimum overdrive current required to switch the input from one state to another.

Skew between outputs of same bank and same package (same transition)
Skew between outputs of all banks and same package (A1 through A8 tied together)







### **OPERATING CHARACTERISTICS**


 $T_A = 25^{\circ}C$ 

PARAMETER			TEST CONDITIONS	V <sub>CC</sub> = 1.8 V TYP	V <sub>CC</sub> = 2.5 V TYP	V <sub>CC</sub> = 3.3 V TYP	UNIT
_	Power dissipation capacitance	Outputs enabled	C 50 % F 40 MUI-	(1)	68	84	PF
$C_{pd}$	per bit (four outputs switching)	Outputs disabled	$C_L = 50 \text{ pF, f} = 10 \text{ MHz}$	(1)	11	14	рΓ

<sup>(1)</sup> This information was not available at the time of publication.




### PARAMETER MEASUREMENT INFORMATION

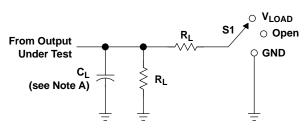

TEST	S1
t <sub>pd</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	V <sub>LOAD</sub>
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

LOAD CIRCUIT

V	INPUT		V	v	•	В	V
V <sub>CC</sub>	VI	t <sub>r</sub> /t <sub>f</sub>	V <sub>M</sub>	V <sub>LOAD</sub>	CL	R <sub>L</sub>	$oldsymbol{V}_\Delta$
1.8 V	V <sub>CC</sub>	≤ <b>2</b> ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	30 pF	<b>1 k</b> Ω	0.15 V
2.5 V $\pm$ 0.2 V	V <sub>CC</sub>	≤2 ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	30 pF	500 Ω	0.15 V
2.7 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V
3.3 V $\pm$ 0.3 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	<b>500</b> Ω	0.3 V

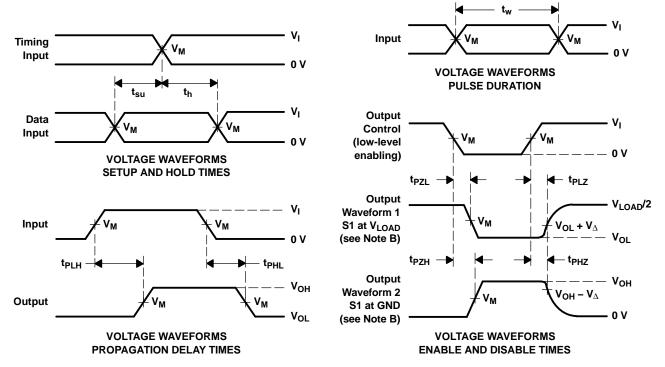

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_{O} = 50 \Omega$ .
- D. The outputs are measured one at a time, with one transition per measurement.
- E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
- H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms





24-Jul-2010

#### **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/ Ball Finish	MSL Peak Temp <sup>(3)</sup>	Samples (Requires Login)
74ALVCH16344DGGRE4	ACTIVE	TSSOP	DGG	56	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Contact TI Distributor or Sales Office
74ALVCH16344DGGRG4	ACTIVE	TSSOP	DGG	56	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Contact TI Distributor or Sales Office
74ALVCH16344DLG4	ACTIVE	SSOP	DL	56	20	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Purchase Samples
74ALVCH16344DLRG4	ACTIVE	SSOP	DL	56		TBD	Call TI	Call TI	Purchase Samples
SN74ALVCH16344DGGR	ACTIVE	TSSOP	DGG	56	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Contact TI Distributor or Sales Office
SN74ALVCH16344DL	ACTIVE	SSOP	DL	56	20	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Purchase Samples
SN74ALVCH16344DLR	ACTIVE	SSOP	DL	56		TBD	Call TI	Call TI	Purchase Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free** (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



# **PACKAGE OPTION ADDENDUM**

24-Jul-2010


In no event shall TI's liabili	ty arising out of such information	n exceed the total purchase	price of the TI part(s) a	at issue in this document sold by	TI to Customer on an annual basis.

# PACKAGE MATERIALS INFORMATION

www.ti.com 23-Jul-2010

# TAPE AND REEL INFORMATION





		Dimension designed to accommodate the component width
		Dimension designed to accommodate the component length
P	<b>〈</b> 0	Dimension designed to accommodate the component thickness
		Overall width of the carrier tape
П	P1	Pitch between successive cavity centers

# QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ALVCH16344DGGR	TSSOP	DGG	56	2000	330.0	24.4	8.6	15.6	1.8	12.0	24.0	Q1

www.ti.com 23-Jul-2010



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ALVCH16344DGGR	TSSOP	DGG	56	2000	346.0	346.0	41.0

### DL (R-PDSO-G\*\*)

### **48 PINS SHOWN**

### PLASTIC SMALL-OUTLINE PACKAGE



NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).

D. Falls within JEDEC MO-118

# DGG (R-PDSO-G\*\*)

# PLASTIC SMALL-OUTLINE PACKAGE

#### **48 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications			
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio		
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive		
DLP® Products	www.dlp.com	Communications and Telecom	www.ti.com/communications		
DSP	<u>dsp.ti.com</u>	Computers and Peripherals	www.ti.com/computers		
Clocks and Timers	www.ti.com/clocks	Consumer Electronics	www.ti.com/consumer-apps		
Interface	interface.ti.com	Energy	www.ti.com/energy		
Logic	logic.ti.com	Industrial	www.ti.com/industrial		
Power Mgmt	power.ti.com	Medical	www.ti.com/medical		
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security		
RFID	www.ti-rfid.com	Space, Avionics & Defense	www.ti.com/space-avionics-defense		
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video and Imaging	www.ti.com/video		
		Wireless	www.ti.com/wireless-apps		