

166L2

166L2 Information



Part Number	166L2
Manufacturer	Hammond Manufacturing
Category	Transformers Power Transformers
Description	XFRMR LAMINATED 6.25VA CHAS MNT
Package	-
	For the pricing/inventory/lead time, please contact us
	Website: https://www.heisener.com
	E-mail: salesdept@heisener.com



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



166L2 Specifications

Manufacturer Part Number	166L2
Manufacturer	Hammond Manufacturing
	-
Category	Transformers
	Power Transformers
Package	-
Series	166
Туре	Laminated Core
Voltage - Primary	115V
Voltage - Secondary (Full Load)	2.5V
Current - Output (Max)	2.5A
Primary Winding(s)	Single
Secondary Winding(s)	Single
Center Tap	Yes
Power - Max	6.25 VA
Mounting Type	Chassis Mount
Termination Style	Wire Leads
Size / Dimension	71.38mm L x 38.10mm W
Height - Seated (Max)	42.93mm
Voltage - Isolation	2000Vrms
Weight	0.7 lb (317.51g)
	Report errors?

166L2 Guarantees

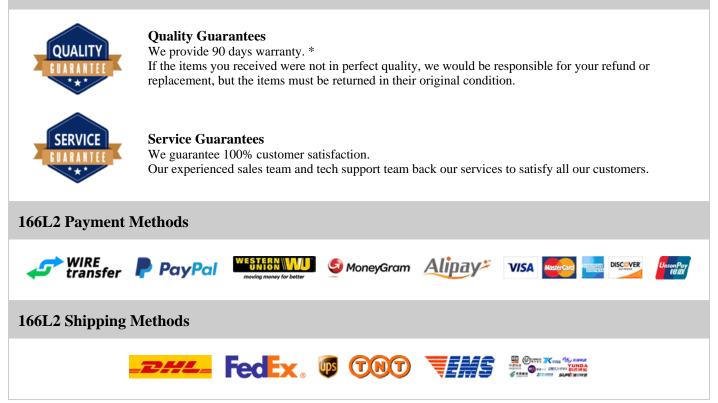

If you have any question about 166L2, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com