

352069-4

352069-4 Information

Heisener.com	Part Number Manufacturer Category Description Package	352069-4 TE Connectivity AMP Connectors Connectors, Interconnects Backplane Connectors - Hard Metric, Standard CONN HDR RECEPT 125 POS RANG 2MM - For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



352069-4 Specifications

ManufacturerTE Connectivity AMP ConnectorsCategoryConnectors, InterconnectsBackplane Connectors - Hard Metric, StandardPackage-PackageConnectors - Hard Metric, StandardSeriesZ-PACKConnector TypeReceptacle, Female SocketsConnector StyleB 25Number of Positions LoadedAllPitch0.079" (2.00mm)Number of Rows5Mounting TypeThrough Hole, Right AngleConnector Usage-Contact Finish-Contact Finish-		
CategoryConnectors, Hard Metric, StandardBackplane Connectors - Hard Metric, StandardPackage-SeriesZ-PACKConnector TypeReceptacle, Female SocketsConnector StyleB 25Number of Positions125Number of Positions LoadedAllPitch0.079" (2.00mm)Number of Rows5Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish-Contact Finish Thickness-	Manufacturer Part Number	352069-4
Backplane Connectors - Hard Metric, StandardPackage-SeriesZ-PACKConnector TypeReceptacle, Female SocketsConnector StyleB 25Number of Positions125Number of Positions LoadedAllPitch0.079" (2.00mm)Number of Rows5Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish-Contact Finish Thickness-	Manufacturer	TE Connectivity AMP Connectors
Package-SeriesZ-PACKConnector TypeReceptacle, Female SocketsConnector StyleB 25Number of Positions125Number of Positions LoadedAllPitch0.079" (2.00mm)Number of Rows5Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish-Contact Finish Thickness-	Category	Connectors, Interconnects
SeriesZ-PACKConnector TypeReceptacle, Female SocketsConnector StyleB 25Number of Positions125Number of Positions LoadedAllPitch0.079" (2.00mm)Number of Rows5Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish Thickness-		Backplane Connectors - Hard Metric, Standard
Connector TypeReceptacle, Female SocketsConnector StyleB 25Number of Positions125Number of Positions LoadedAllPitch0.079" (2.00mm)Number of Rows5Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish Thickness-	Package	-
Connector StyleB 25Number of Positions125Number of Positions LoadedAllPitch0.079" (2.00mm)Number of Rows5Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish-Contact Finish Thickness-	Series	Z-PACK
Number of Positions125Number of Positions LoadedAllPitch0.079" (2.00mm)Number of Rows5Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish-Contact Finish Thickness-	Connector Type	Receptacle, Female Sockets
Number of Positions LoadedAllPitch0.079" (2.00mm)Number of Rows5Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish-Contact Finish Thickness-	Connector Style	B 25
Pitch0.079" (2.00mm)Number of Rows5Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish-Contact Finish Thickness-	Number of Positions	125
Number of Rows5Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish-Contact Finish Thickness-	Number of Positions Loaded	All
Mounting TypeThrough Hole, Right AngleTerminationPress-FitConnector Usage-Contact Finish-Contact Finish Thickness-	Pitch	0.079" (2.00mm)
TerminationPress-FitConnector Usage-Contact Finish-Contact Finish Thickness-	Number of Rows	5
Connector Usage-Contact Finish-Contact Finish Thickness-	Mounting Type	Through Hole, Right Angle
Contact Finish - Contact Finish Thickness -	Termination	Press-Fit
Contact Finish Thickness -	Connector Usage	-
	Contact Finish	-
Report errors?	Contact Finish Thickness	-
		Report errors?

352069-4 Guarantees

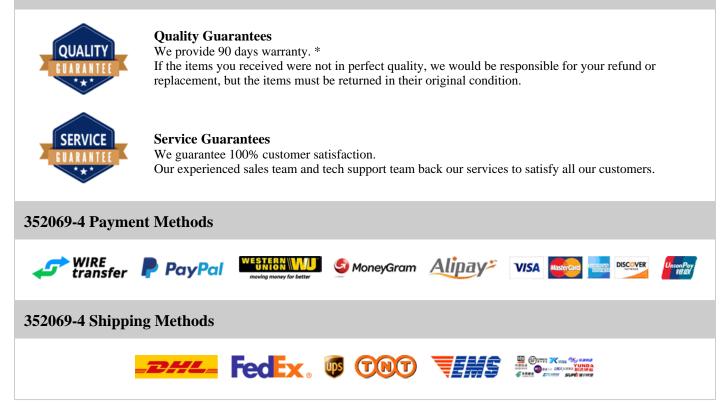

If you have any question about 352069-4, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com