

H11A1

H11A1 Information

| | | Part Number | H11A1 |
|--------|--------------|--------------|---|
| | | Manufacturer | Everlight Electronics Co Ltd |
| () H | sisener.com | Category | Isolators Optoisolators - Transistor, Photovoltaic Output |
| 141 | | Description | OPTOISO 5KV TRANS W/BASE 6DIP |
| | | Package | 6-DIP (0.300", 7.62mm) |
| | | | For the pricing/inventory/lead time, please contact |
| For Re | ference Only | | us Website: https://www.heisener.com E-mail: salesdept@heisener.com |



Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




Request a Quote

H11A1 Specifications

| Manufacturer Part Number | H11A1 |
|---------------------------------|---|
| Manufacturer | Everlight Electronics Co Ltd |
| Category | Isolators |
| | Optoisolators - Transistor, Photovoltaic Output |
| Package | 6-DIP (0.300", 7.62mm) |
| Series | - |
| Number of Channels | 1 |
| Voltage - Isolation | 5000Vrms |
| Current Transfer Ratio (Min) | 50% @ 10mA |
| Current Transfer Ratio (Max) | - |
| Turn On / Turn Off Time (Typ) | 3µs, 3µs |
| Rise / Fall Time (Typ) | - |
| Input Type | DC |
| Output Type | Transistor with Base |
| Voltage - Output (Max) | 80V |
| Current - Output / Channel | - |
| Voltage - Forward (Vf) (Typ) | 1.2V |
| Current - DC Forward (If) (Max) | 60mA |
| Vce Saturation (Max) | 400mV |
| Operating Temperature | -55°C ~ 110°C |
| Mounting Type | Through Hole |
| Package / Case | 6-DIP (0.300", 7.62mm) |
| Supplier Device Package | 6-DIP |
| | Report errors? |

H11A1 Guarantees

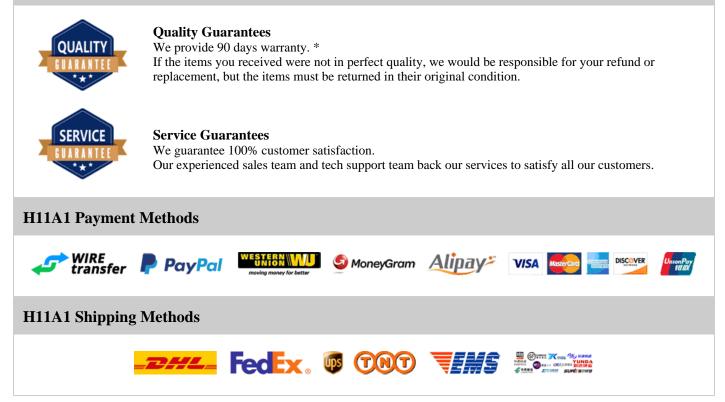

If you have any question about H11A1, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com