

RLB0608-181KL

RLB0608-181KL Information




Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



RLB0608-181KL Specifications

| - | |
|---------------------------|-----------------------------------|
| Manufacturer Part Number | RLB0608-181KL |
| Manufacturer | Bourns Inc. |
| Category | Inductors, Coils, Chokes |
| | Fixed Inductors |
| Package | Radial |
| Series | RLB |
| Туре | Wirewound |
| Material - Core | Ferrite |
| Inductance | 180µН |
| Tolerance | ±10% |
| Current Rating | 235mA |
| Current - Saturation | - |
| Shielding | Unshielded |
| DC Resistance (DCR) | 2.3 Ohm Max |
| Q @ Freq | 50 @ 796kHz |
| Frequency - Self Resonant | 4.2MHz |
| Ratings | - |
| Operating Temperature | -40° C ~ 105° C |
| Frequency - Test | 796kHz |
| Features | - |
| Mounting Type | Through Hole |
| Package / Case | Radial |
| Supplier Device Package | - |
| Size / Dimension | 0.197" Dia (5.00mm) |
| | |

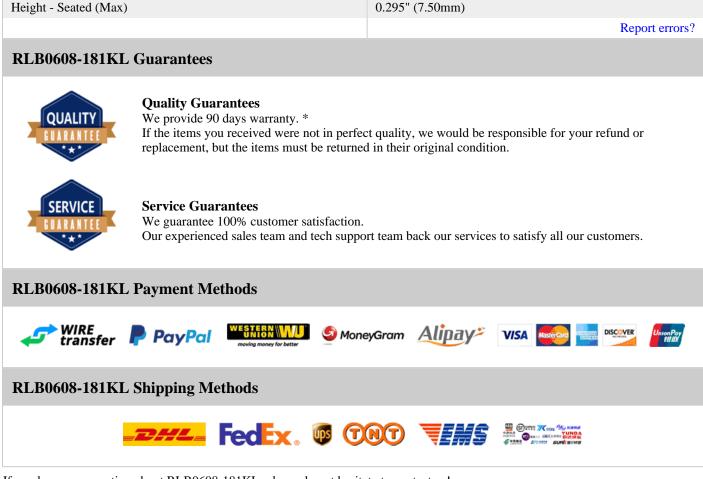

If you have any question about RLB0608-181KL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com