

VI-J2L-IX-B1

VI-J2L-IX-B1 Information



| Part Number | VI-J2L-IX-B1 |
|--------------|---|
| Manufacturer | Vicor Corporation |
| Category | Power Supplies - Board Mount DC DC Converters |
| Description | CONVERTER MOD DC/DC 28V 75W |
| Package | Half Brick |
| | For the pricing/inventory/lead time, please contact |
| | us |
| | Website: https://www.heisener.com |
| | E-mail: salesdept@heisener.com |



Request a Quote

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.

Part




VI-J2L-IX-B1 Specifications

| Manufacturer Part Number | VI-J2L-IX-B1 |
|--------------------------|--|
| Manufacturer | Vicor Corporation |
| Category | Power Supplies - Board Mount |
| | DC DC Converters |
| Package | Half Brick |
| Series | VI-J00 |
| Туре | Isolated Module |
| Number of Outputs | 1 |
| Voltage - Input (Min) | 21V |
| Voltage - Input (Max) | 56V |
| Voltage - Output 1 | 28V |
| Voltage - Output 2 | - |
| Voltage - Output 3 | - |
| Voltage - Output 4 | - |
| Current - Output (Max) | 2.68A |
| Power (Watts) | 75W |
| Voltage - Isolation | 3kV (3000V) |
| Applications | ITE (Commercial) |
| Features | OCP, SCP |
| Operating Temperature | $-40^{\circ}C \sim 100^{\circ}C$ |
| Efficiency | 90% |
| Mounting Type | Through Hole |
| Package / Case | Half Brick |
| Size / Dimension | 2.36" L x 2.28" W x 1.08" H (59.9mm x 57.9mm x 27.4mm) |
| | |

| Supplier Device Package | - |
|-------------------------|----------------|
| Control Features | - |
| | Report errors? |

VI-J2L-IX-B1 Guarantees

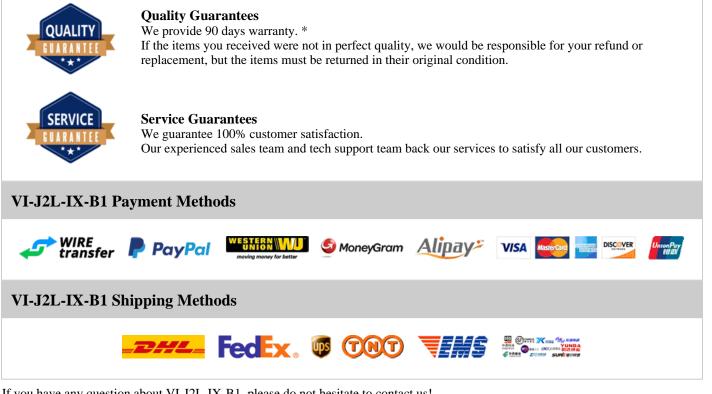

If you have any question about VI-J2L-IX-B1, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com