




TOLERANCE:
±0.3mm UNLESS OTHERWISE
SPECIFIED

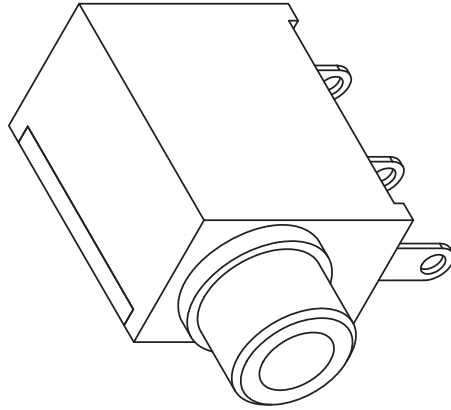

CON

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE:	3.5mm AUDIO JACK - MONO	REV:	A
--------	-------------------------	------	---


PART NO.	MJ-3502N	UNITS:	MM [INCHES]
----------	----------	--------	-------------

DRAWN BY: ZRJ	APPROVED BY:	SCALE: 3:1
------------------	--------------	---------------

SPECIFICATIONS:
RATING: 12V DC @ 1A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -20° ~ +85°C

		MATERIAL	PLATING
TERMINAL 1		Brass	Silver
TERMINAL 2		Phosphor Bronze	Silver
TERMINAL 3		Brass	Silver
BARREL		Brass	Nickel
HOUSING		POM	Black Color
COVER		PC	Transparent

PCB LAYOUT
TOP VIEW

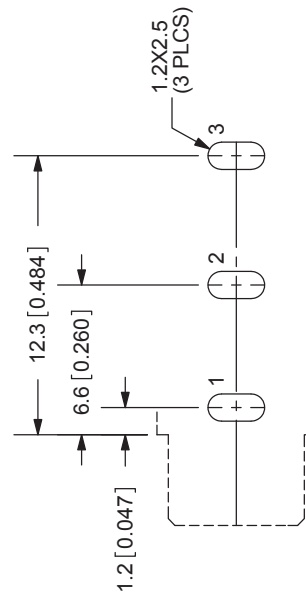

MODEL NO.	MJ-3502N
DIA.	NON-THREAD
	Ø6.0
SCHEMATIC	