




Quality Products. Service Excellence.


24V / Small Control Open Style, Chassis Mount *PHC Series*

120V, 208V, 347V or 600V Primary

Features

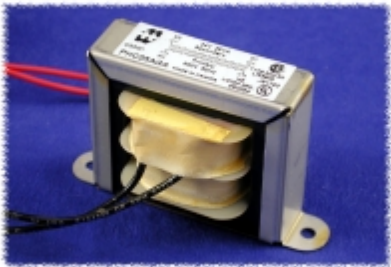

- Used as a small 24 volt transformer for relay, pilot lights or low voltage, low power control use.
- 60 Hz. operation.
- Chassis mount.
- With 10" leads.
- CSA certified (209651)
- UL listed (File #E207860)

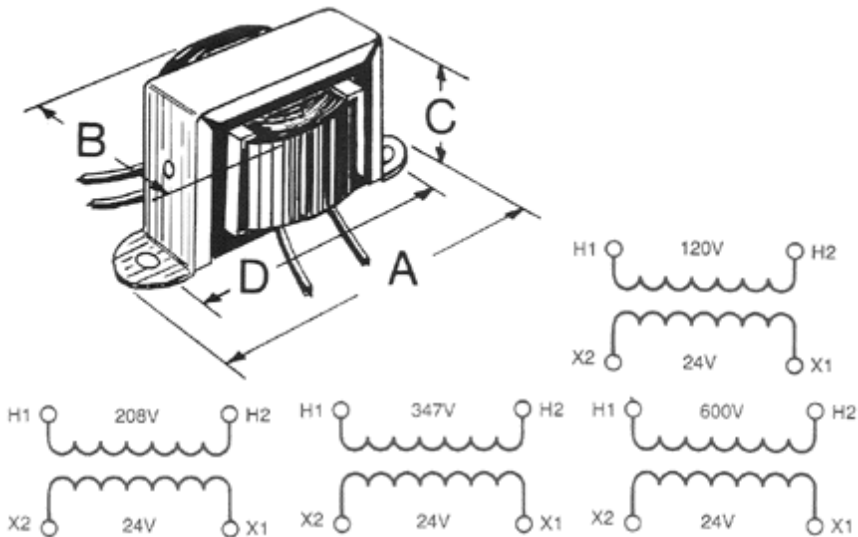

| Part No. | Primary Voltage | Secondary Voltage | Secondary      |    | Overall Dimensions |           |           | Mounting         |
|----------|-----------------|-------------------|----------------|----|--------------------|-----------|-----------|------------------|
|          |                 |                   | Current (Amps) | VA | Height (C)         | Width (A) | Depth (B) | Hole Centers (D) |
| PHC50PGA | 24              | 24 VCT            | 2.08           | 50 | 2.63               | 4.00      | 2.25      | 3.56             |
| PHC25JGA | 120             | 24                | 1.04           | 25 | 2.31               | 3.69      | 2.13      | 3.13             |
| PHC50JGA | 120             | 24                | 2.08           | 50 | 2.63               | 4.00      | 2.50      | 3.56             |
| PHC25LGA | 208             | 24                | 1.04           | 25 | 2.31               | 3.69      | 2.13      | 3.13             |
| PHC50LGA | 208             | 24                | 2.08           | 50 | 2.63               | 4.00      | 2.50      | 3.56             |
| PHC25KGA | 347             | 24                | 1.04           | 25 | 2.31               | 3.69      | 2.13      | 3.13             |
| PHC50KGA | 347             | 24                | 2.08           | 50 | 2.63               | 4.00      | 2.50      | 3.56             |
| PHC25FGA | 480             | 24                | 1.04           | 25 | 2.31               | 3.69      | 2.13      | 3.13             |
| PHC50FGA | 480             | 24                | 2.08           | 50 | 2.63               | 4.00      | 2.50      | 3.56             |
| PHC25AGA | 600             | 24                | 1.04           | 25 | 2.31               | 3.69      | 2.13      | 3.13             |
| PHC50AGA | 600             | 24                | 2.08           | 50 | 2.63               | 4.00      | 2.50      | 3.56             |

Data subject to change without notice

