

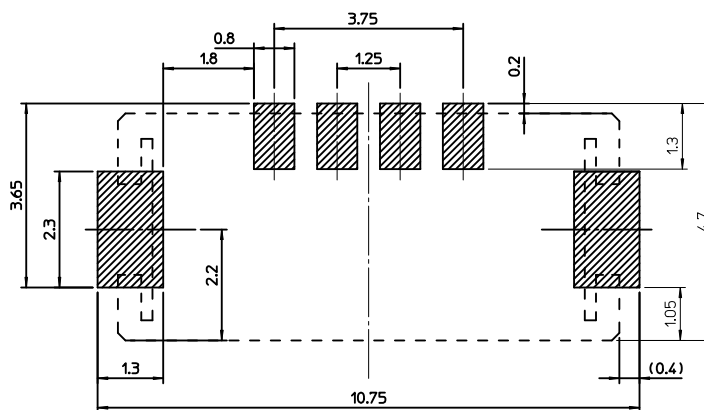
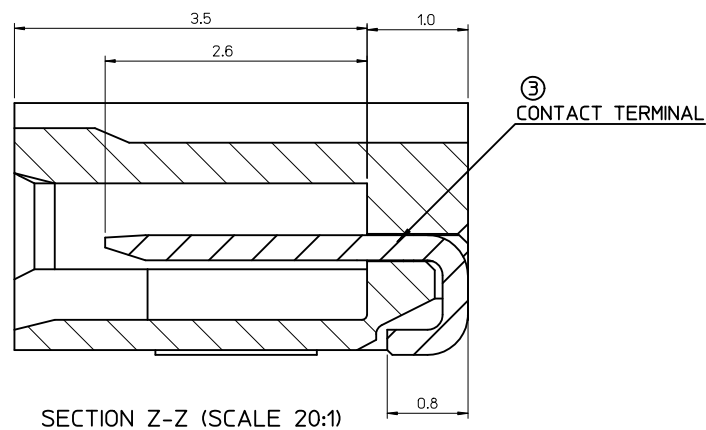
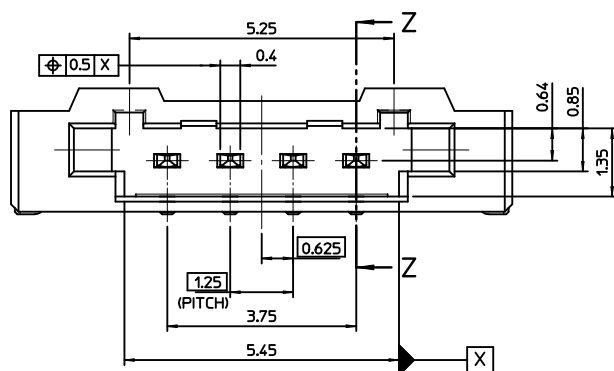
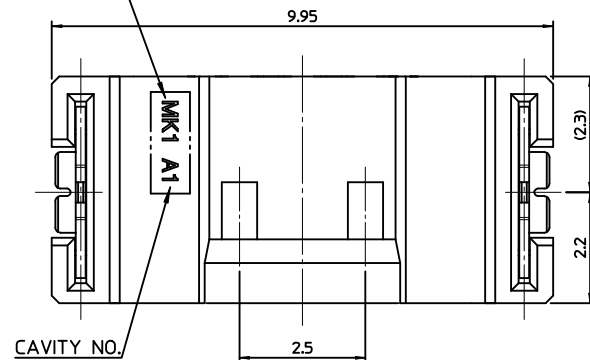




TRADE MARK

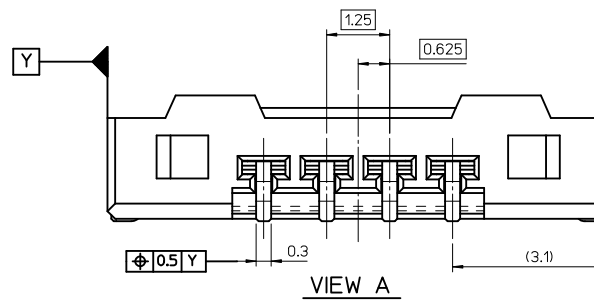

RECOMMEND PATTERN (REF.)
(GENERAL TOLERANCE ± 0.05)

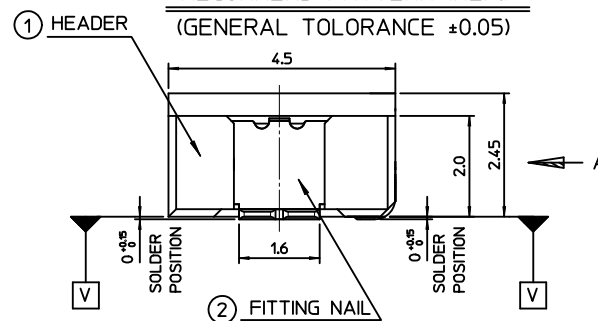

VIEW A

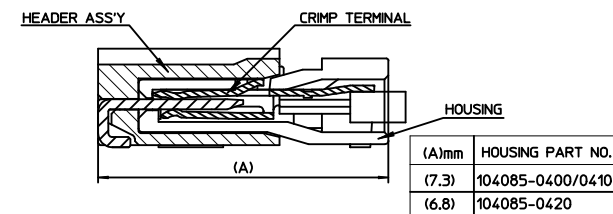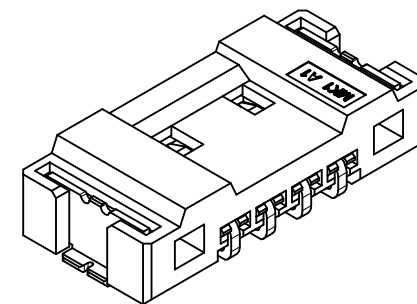

MATED CONDITION (REF.)

NOTE

- MATED WITH : 104085-0400, 104085-0410, 101085-0420
- MATERIALS
 - HEADER : LCP(E130I), GLASS FILLED, UL94V-0, HALOGEN FREE, COLOR OF NATURAL
 - FITTING NAIL : PHOSPHOR BRONZE, 0.2mm THICKNESS
 - CONTACT TERMINAL : POSPHOR BRONZE, 0.25mm THICKNESS
- FINISHES
 - FITTING NAIL : PURE-TIN PLATING ON OVERALL.
THICKNESS 3.0 μ m-5.0 μ m
UNDER PLATING Ni OVERALL.
THICKNESS 1.25 μ m-3.75 μ m
 - CONTACT TERMINAL : PURE-TIN PLATING ON OVERALL.
THICKNESS 3.0 μ m-5.0 μ m
UNDER PLATING Ni OVERALL.
THICKNESS 1.25 μ m-3.75 μ m
- COPLANALITY OF SOLDER TAILS (PEAK TEMP. : 260°C), BEFORE & AFTER REFLOW : 0.08MAX

NEW RELEASED EC NO: KOR2011-0057 DRWN:CBCHIN 2010/12/02 CHKD:SH.CHU 2010/12/02 APPR:YUNS/IKK/IM 2010/12/02	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	ORDER NUMBER	104086-0410
	▽=0	mm INCH	MM ONLY	10:1	DESIGN UNITS	METRIC
	▽=0	4 PLACES ± --- ± ---	DRAWN BY	DATE	THIRD ANGLE PROJECTION	
		3 PLACES ± --- ± ---	JB.JIN	2010/07/08		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	2 PLACES ± 0.20 ± ---	CHECKED BY	DATE	MOLEX INCORPORATED DOCUMENT NO. SD-104086-001	SHEET NO. 1 OF 01
	1 PLACE ± 0.25 ± ---	SH.CHU	2010/07/08		
	ANGULAR ± ---°	APPROVED BY	DATE		
		YS00.KIM	2010/07/08		

SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	1040860410

