

SUMMARY

Wires

Low	4
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	C
Termination type	Female crimp
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	CAB.M04.GYC.C92G
Status	active
Alternative part	



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	CK*: Fixed receptacle with two nuts (back panel mounting)
Keying	3 keys (alpha=0, gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	∅ 0 - 0 mm
Variant	
Weight	5.85 g

Performance

Configuration	2P.M04 : 4 Low V.
Insulator	
Rated Current	15 Amps

Specifications

Test voltage (kV rms) Contact-contact:	1.85
Air clearance min. (mm) or Creepage distance min. (mm):	1.8


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

- F ret (min): 150 N
- F ret (max): 250 N
- Steam sterilization: 20 times
- IP Rating: 50

DRAWINGS

Draws

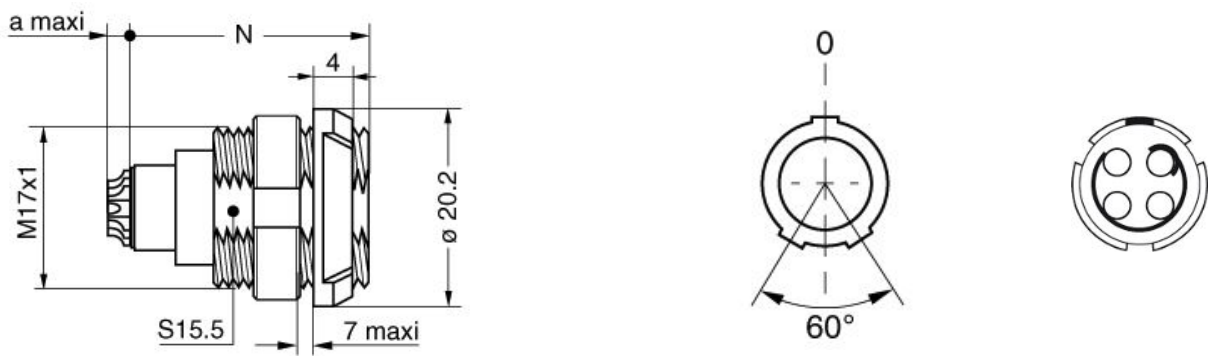

Dimensions

	A	N	a
mm.	20.2	25.1	0
in.	0,80	0,99	0,00

RECOMMENDED BY LEMO

Tools

- Crimp Tool: DPC.91.701.V
- Crimp settings: AWG/Selector = 18-20/8-7
- Positionner: DCE.91.132.BVM
- Extractor: DCF.91.131.2LT
- Replacement contact: EGG.2B.665.ZZM

Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.