

# AMM40DTBS-S189

### AMM40DTBS-S189 Information

Heisener.com	 AMM40DTBS-S189 Sullins Connector Solutions Connectors, Interconnects Card Edge Connectors - Edgeboard Connectors CONN EDGE DUAL FMALE 80POS 0.156 - For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### **AMM40DTBS-S189 Specifications**

ManufacturerSullins Connector SolutionsCategoryConnectors, InterconnectsCard Edge Connectors - Edgeboard ConnectorsPackage-Stries-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row40Number of Positions/Bay/Row0.062" (1.57mm)Number of Rows0.062" (1.57mm)Number of Rows2Pitch0.156" (3.96mm)Features-Mounting TypeThrough Hole, Right AngleContact MaterialGoldContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature65°C ~ 150°C			
CategoryConnectors, InterconnectsCard Edge Connectors - Edgeboard ConnectorsPackage-Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row40Number of Positions/Bay/Row80Card Thickness0.062° (1.57mm)Number of Rows2Pitch0.156° (3.96mm)Features-Mounting TypeForogh Hole, Right AngleContact MaterialSolderContact Finish Thickness0.0161° (Jung)Contact Finish Thickness0.0161° (Jung)Contact TypeGoldContact TypeGolderseContact TypeSolien Solien S	Manufacturer Part Number	AMM40DTBS-S189	
AndCard Edge Connectors - Edgeboard ConnectorsPackage-Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row40Number of Positions80Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.156" (3.96mm)Features-Mounting TypeThrough Hole, Right AngleContact MaterialSolderContact Finish Thickness30µin (0.76µm)Contact TypeLoop BellowsContact TypeSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Manufacturer	Sullins Connector Solutions	
Package-Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row40Number of Positions80Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.156" (3.96mm)Features-Mounting TypeThrough Hole, Right AngleContact MaterialSolderContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Category	Connectors, Interconnects	
Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row40Number of Positions/Bay/Row80Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.156" (3.96mm)Features-Mounting TypeThrough Hole, Right AngleContact FinishSolderContact Finish Thickness30µin (0.76µm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C		Card Edge Connectors - Edgeboard Connectors	
Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row40Number of Positions80Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.156" (3.96mm)Features-Mounting TypeThrough Hole, Right AngleContact MaterialSolderContact FinishGoldContact Finish ThicknessJojin (0.76µm)Contact TypeGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating TemperatureSide Yang Yang Yang Yang Yang Yang Yang Yang	Package	-	
GenderFemaleNumber of Positions/Bay/Row40Number of Positions80Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.156" (3.96mm)Features-Mounting TypeThrough Hole, Right AngleContact MaterialSolderContact FinishGoldContact TypeJop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-50°C~150°C	Series	-	
Number of Positions/Bay/Row40Number of Positions80Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.156" (3.96mm)Features-Mounting TypeThrough Hole, Right AngleContact MaterialSolderContact FinishGoldContact TypeJupi (0.76µm)Contact TypeGolg BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating TemperatureSi3°C ~ 150°C	Card Type	Non Specified - Dual Edge	
Number of Positions 80   Card Thickness 0.062" (1.57mm)   Number of Rows 2   Pitch 0.156" (3.96mm)   Features -   Mounting Type Through Hole, Right Angle   Cortact Material Solder   Contact Finish Gold   Contact Finish Thickness 30µin (0.76µm)   Contact Type Loop Bellows   Color Green   Flange Feature Side Mount Opening, Unthreaded, 0.125" (3.18mm) Dia   Operating Temperature -65°C ~ 150°C	Gender	Female	
Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.156" (3.96mm)Features-Mounting TypeThrough Hole, Right AngleTerminationSolderContact MaterialBeryllium CopperContact Finish ThicknessGoldContact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-50°C ~ 150°C	Number of Positions/Bay/Row	40	
Number of Rows2Pitch0.156" (3.96mm)Features-Mounting TypeThrough Hole, Right AngleTerminationSolderContact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Number of Positions	80	
Pitch0.156" (3.96mm)Features-Mounting TypeThrough Hole, Right AngleTerminationSolderContact MaterialBeryllium CopperContact Finish ThicknessGoldContact Finish Thickness30µin (0.76µm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Card Thickness	0.062" (1.57mm)	
Features-Mounting TypeThrough Hole, Right AngleTerminationSolderContact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Number of Rows	2	
Mounting TypeThrough Hole, Right AngleTerminationSolderContact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Pitch	0.156" (3.96mm)	
TerminationSolderContact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30μin (0.76μm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Features	-	
Contact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Mounting Type	Through Hole, Right Angle	
Contact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Termination	Solder	
Contact Finish Thickness30μin (0.76μm)Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Contact Material	Beryllium Copper	
Contact TypeLoop BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Contact Finish	Gold	
ColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Contact Finish Thickness	30µin (0.76µm)	
Flange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 150°C	Contact Type	Loop Bellows	
Operating Temperature $-65^{\circ}C \sim 150^{\circ}C$	Color	Green	
	Flange Feature	Side Mount Opening, Unthreaded, 0.125" (3.18mm) Dia	
Report errors?	Operating Temperature	$-65^{\circ}$ C ~ $150^{\circ}$ C	
			Report errors?

### **AMM40DTBS-S189** Guarantees



Quality Guarantees


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### AMM40DTBS-S189 Payment Methods

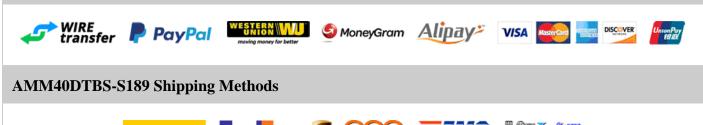



If you have any question about AMM40DTBS-S189, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com