


CMF5540K200FHR670

CMF5540K200FHR670 Information

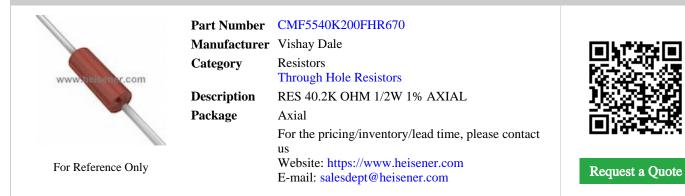

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF5540K200FHR670 Specifications

Manufacturer Part Number CMF5540K200FHR670 Manufacturer Vishay Dale Category Resistors Through Hole Resistors Through Hole Resistors Package Axial Series CMF Resistance 40.2 KOhms Tolerance ±1% Power (Watts) 0.5W, 1/2W Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Operating Temperature -55°C ~ 175°C Package / Case Axial Size / Dimension 0.900° Dia x 0.240° L (2.29mm x 6.10mm) Height - Seated (Max) - Number of Terminations 2 Failure Rete -		
CategoryResistorsPackageAxialPackageCMFResistance40.2 kOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°COperating TemperatureAxialSize / Dimension0.900° Dia x 0.240° L (2.29mm x 6.10mm)Size / Dimension2Height - Seated (Max)2Starler Retard2	Manufacturer Part Number	CMF5540K200FHR670
Through Hole ResistorsPackageAxialSeriesCMFResistance40.2 kOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-	Manufacturer	Vishay Dale
PackageAxialSeriesCMFResistance40.2 kOhmsTolerance±1%Power (Wats)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±50ppm/°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.900° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Failure Rate-	Category	Resistors
SeriesCMFResistance40.2 kOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±50pm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors
Resistance40.2 kOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°COperating TemperatureAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-	Package	Axial
Tolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-State Seated (Max)- </td <td>Series</td> <td>CMF</td>	Series	CMF
Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Resistance	40.2 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.5W, 1/2W
Temperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±50ppm/°C
Supplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Size / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.090" Dia x 0.240" L (2.29mm x 6.10mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

CMF5540K200FHR670 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

S MoneyGram Alipay VISA

DISCOVER

CMF5540K200FHR670 Payment Methods WIRE transfer

PayPal



 \mathbf{N}

UNION



If you have any question about CMF5540K200FHR670, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com