


# CMF5570K000BHEB

### **CMF5570K000BHEB Information**

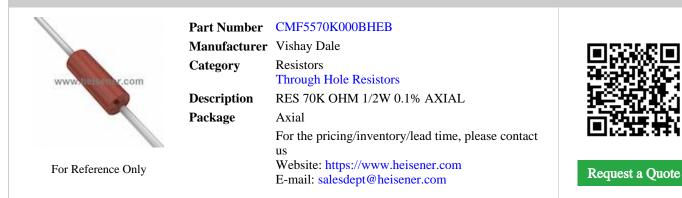

# **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **CMF5570K000BHEB** Specifications

Manufacturer Part Number CMF5570K000BHEB   Manufacturer Vishay Dale   Category Resistors   Category Through Hole Resistors   Package Axial   Series CMF   Resistance 70 KOhms   Tolerance ±0.1%   Power (Watts) 0.5W, 1/2W   Composition Metal Film   Features Flame Retardant Coating, Moisture Resistant, Safety   Operating Temperature -55°C ~ 175°C   Operating Temperature Axial   Size / Dimension 0.0900° Dia x 0.240° L (2.29mm x 6.10mm)   Height - Seated (Max) -   Number of Terminations 2   Faiture Rate -		
CategoryResistorsPackageAxialPackageAxialSeriesCMFResistance70 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Falumer Ret1Falure Ret1Falure Ret1Starder Terminations2Falure Ret1Falure	Manufacturer Part Number	CMF5570K000BHEB
Through Hole ResistorsPackageAxialPackageCMFResistance70 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTomperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Failure Rate-Failure Rate<	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance70 kOhmsTolerance±0.1%Power (Wats)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±50ppm/°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.900° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Failure Rate-Failure Rate2	Category	Resistors
SeriesCMFResistance70 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±50pm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors
Resistance70 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate-	Package	Axial
Tolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-Other Seated (Max)-State Seated (Max)-	Series	CMF
Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Resistance	70 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 0.1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.5W, 1/2W
Temperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±50ppm/°C
Supplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Number of Terminations0.090" Dia x 0.240" L (2.29mm x 6.10mm)Failure Rate-Autor of Terminations-Construc	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.090" Dia x 0.240" L (2.29mm x 6.10mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
Report chois.		Report errors?

#### **CMF5570K000BHEB** Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### **CMF5570K000BHEB Payment Methods**



If you have any question about CMF5570K000BHEB, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com