


CMF6033R000JKR664

CMF6033R000JKR664 Information

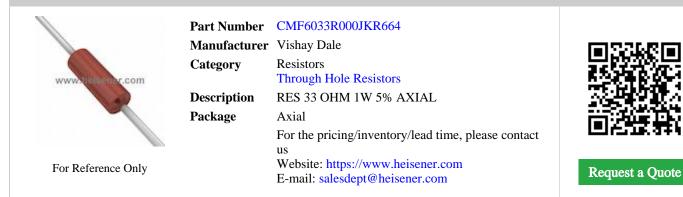

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF6033R000JKR664 Specifications

Manufacturer Part Number CMF6033R000JKR664 Manufacturer Vishay Dale Category Resistors Category Through Hole Resistors Package Axial Series CMF Resistance 33 Ohms Tolerance ±5% Power (Watts) IW Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Operating Temperature -55°C ~ 175°C Package / Case Axial Supplier Device Package Axial Size / Dimension 0.145° Dia x 0.344" L (3.68mm x 8.74mm) Height - Seated (Max) - Number of Terminations 2		
CategoryResistorsPackageAxialPackageCMFResistance33 OhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSuppler Device PackageAxialSize / Dimension0.145° Diax 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate1Failure Rate-Failure Rate-	Manufacturer Part Number	CMF6033R000JKR664
Through Hole ResistorsPackageAxialSeriesCMFResistance33 OhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTomperature Coefficient±100ppm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance33 OhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±5°°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-Failure Rate2	Category	Resistors
SeriesCMFResistance33 OhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-Failure Rate- <t< td=""><td></td><td>Through Hole Resistors</td></t<>		Through Hole Resistors
Resistance33 OhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate-	Package	Axial
Tolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-Other Seated (Max)-State Seated (Max)- <trt< td=""><td>Series</td><td>CMF</td></trt<>	Series	CMF
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Resistance	33 Ohms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 5\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	1W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Size / Dimension 0.145" Dia x 0.344" L (3.68mm x 8.74mm) Height - Seated (Max) - Number of Terminations 2 Failure Rate -	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.145" Dia x 0.344" L (3.68mm x 8.74mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

CMF6033R000JKR664 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF6033R000JKR664 Payment Methods

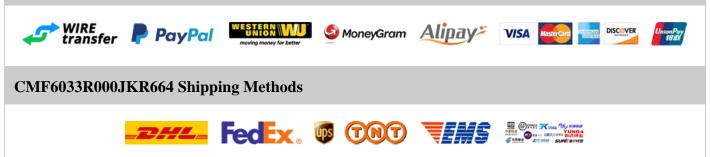

If you have any question about CMF6033R000JKR664, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com