


FK18C0G1H220J

FK18C0G1H220J Information

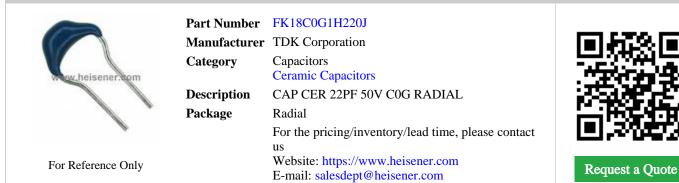

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FK18C0G1H220J Specifications

Manufacturer Part Number FK18C0G1H220J Manufacturer TDK Corporation Category Capacitors Package Radial Series FK Capacitance 22pF Yoltage - Rated 50° Operating Temperature 50° Operating Temperature -55° Faitings - Applications General Purpose Applications General Purpose Faiture Rate - Mounting Type Through Hole Size / Dimension 0.157° L x 0.098″ W (4.00mm x 2.50mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing - Lead Spacing -		
CategoryCapacitorsPackageRadialSeriesRadialCapacitance22pFCaleactance50°Yoltage - Rated50°Yoltage - Rated60°, NP0Temperature Coefficient60°, NP0Operating Temperature-55° C ~ 125°CPattings-61°ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAidialSiz / Dimension0.15″ L x 0.098″ W (4.00mm x 2.50mm)Height - Seated (Max)0.21″ (5.50mm)Height - Seated (Max)0.09″ (2.50mm)Lead Spacing600% (2.50mm)Lead StyleFormed Leads - Kinked	Manufacturer Part Number	FK18C0G1H220J
Ceramic CapacitorsPackageRadialSeriesFKCapacitance22pFTolerance±5%Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Manufacturer	TDK Corporation
PackageRadialSeriesFKCapacitance2pFTolerance±5%Voltage - Rated50VTemperature CoefficientC0G, NP0Operating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFolume Rate-Mounting TypeMile HolePackage / CaseRadialSize / Dimension0.157° L x 0.098° W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.21° (5.50mm)Lead Spacing0.098° (2.50mm)Lead StyleFormed Leads - Kinked	Category	Capacitors
Series FK Capacitance 22pF Tolerance ±5% Voltage - Rated 50V Temperature Coefficient C0G, NP0 Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Mounting Type Hrough Hole Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) 0.217" (5.50mm) Thickness (Max) - Lead Spacing 0.098" (2.50mm) Lead Style Formed Leades - Kinked		Ceramic Capacitors
Capacitance22pFTolerance±5%Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Package	Radial
Tolerance±%Voltage - Rated50VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Lead Spacing0.98" (2.50mm)Lead StyleFormed Leads - Kinked	Series	FK
Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeHolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.098" (2.50mm)Lead SpacingFormed Leads - Kinked	Capacitance	22pF
Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.098" (2.50mm) Lead Style Formed Leads - Kinked	Tolerance	±5%
Operating Temperature.55°C ~ 125°CFeatures.Ratings.ApplicationsGeneral PurposeFailure Rate.Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max).Thickness (Max).Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	50V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadiaSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leades - Kinked	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)0.098" (2.50mm)Lead SpacingFormed Leads - Kinked	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)0.098" (2.50mm)Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) 0.217" (5.50mm) Thickness (Max) - Lead Spacing 0.098" (2.50mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Size / Dimension	0.157" L x 0.098" W (4.00mm x 2.50mm)
Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.217" (5.50mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
•	Lead Spacing	0.098" (2.50mm)
Report errors?	Lead Style	Formed Leads - Kinked
		Report errors?

FK18C0G1H220J Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FK18C0G1H220J Payment Methods



FK18C0G1H220J Shipping Methods



If you have any question about FK18C0G1H220J, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com