


MKP385322040JC02G0

MKP385322040JC02G0 Information

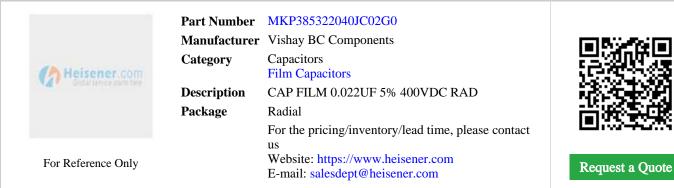

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



MKP385322040JC02G0 Specifications

Manufacturer Vishay BC Components Capacitors Capacitors Film Capacitors Film Capacitors Package Radial Series MKP385 Capacitance 0.022µF Folerance ±5% Voltage Rating - AC 200V Voltage Rating - DC 400V Dielectric Material Polypropylene (PP), Metallized Operating Temperature -5°C ~ 110°C Package / Case Radial Size / Dimension 0.394" L x 0.157" W (10.00mm x 4.00mm) Height - Seated (Max) 0.354" (9.00mm) Fermination CP Fins Lead Spacing 0.295" (7.50mm) Applications JC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT		
CapacitorsPackageRadialSeriesMKP385Capacitors0.022µFCopacitance0.022µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolyproplene (PP), MetallizedDoperating Temperature-Operating Temperature-55°C ~ 110°CPackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)FerminationPC PinsLead Spacing0.295" (7.50mm)Applications0.295" (7.50mm)Features-	Manufacturer Part Number	MKP385322040JC02G0
Fin CapacitorsPackageRadialSeriesMKP385Capacitance0.022µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)PC Pins0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Manufacturer	Vishay BC Components
PackageRadialSeriesMKP385Capacitance0.022µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Fermination0.259" (7.50mm)Lead Spacing0.259" (7.50mm)Features-Features-Features-	Category	Capacitors
Series MKP385 Capacitance 0.022µF Folerance ±5% Voltage Rating - AC 200V Voltage Rating - DC 400V Dielectric Material Polypropylene (PP), Metallized Dielectric Material - Doperating Temperature -55°C ~ 110°C Mounting Type Through Hole Package / Case Radial Size / Dimension 0.394" L x 0.157" W (10.00mm x 4.00mm) Height - Seated (Max) 0.394" (9.00mm) Permination PC Pins Lead Spacing 0.295" (7.50mm) Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -		Film Capacitors
Capacitance0.022µFTolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolyproylene (PP), MetallizedDielectric Material-ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeRadialPackage / CaseRadialSize / Dimension0.354" (9.00mm) x 4.00mm)Height - Seated (Max)0.354" (9.00mm)PerminationPC PinsLead Spacing0.295" (7.50mm)Applications-Features-	Package	Radial
Tolerance±5%Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)PerminationPC PinsLead Spacing0.295" (7.50mm)Applications-Features-	Series	MKP385
Voltage Rating - AC200VVoltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)FerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Capacitance	0.022µF
Voltage Rating - DC400VDielectric MaterialPolypropylene (PP), MetallizedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)PerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Tolerance	±5%
Dielectric MaterialPolypropylene (PP), MetallizedDielectric Material-ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)FerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - AC	200V
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Voltage Rating - DC	400V
Operating Temperature-55°C ~ 110°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)FerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Dielectric Material	Polypropylene (PP), Metallized
Mounting TypeThrough HolePackage / CaseRadialPackage / Case0.394" L x 0.157" W (10.00mm x 4.00mm)Size / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	ESR (Equivalent Series Resistance)	-
Package / CaseRadialSize / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)FerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Operating Temperature	-55°C ~ 110°C
Size / Dimension0.394" L x 0.157" W (10.00mm x 4.00mm)Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Mounting Type	Through Hole
Height - Seated (Max)0.354" (9.00mm)TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Package / Case	Radial
TerminationPC PinsLead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Size / Dimension	0.394" L x 0.157" W (10.00mm x 4.00mm)
Lead Spacing0.295" (7.50mm)ApplicationsDC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DTFeatures-	Height - Seated (Max)	0.354" (9.00mm)
Applications DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT Features -	Termination	PC Pins
Features -	Lead Spacing	0.295" (7.50mm)
	Applications	DC Link, DC Filtering; High Frequency, Switching; High Pulse, DV/DT
Report errors?	Features	-
1		Report errors?

MKP385322040JC02G0 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

MKP385322040JC02G0 Payment Methods

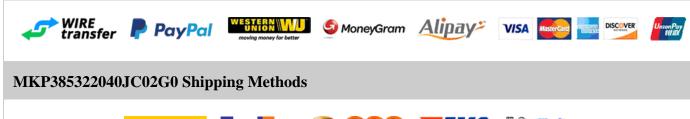



If you have any question about MKP385322040JC02G0, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com